



2026

IMOLA
OUTDOOR



FARE FUTURO
FURTHER
TOGETHER

COOPERATIVA

CERAMICA

IMOLA-DAL 1874

OUTDOOR — 2

20 mm / 18 mm — 8

10 mm — 109

**informazioni
generali** — 152
GENERAL INFORMATION

**AL DI FUORI DELLE
ASPETTATIVE.
QUALSIASI SIA
IL TUO PROGETTO.**

**Beyond expectations.
Whatever your project is.**



Residential



Retail



Malls



Public spaces



Garden



Pool

LA CERAMICA È PROBABILMENTE IL MATERIALE PIÙ VERSATILE CHE CONOSCIAMO. È DUTTILE, RESISTENTE E SI PRESTA AD INFINITI USI, FORMATI E LAVORAZIONI.

NUMEROSI SONO I VANTAGGI CHE OFFRE DAL PUNTO DI VISTA DELLE PRESTAZIONI TECNICHE QUALI LA BASSA POROSITÀ, UN'ALTA IMPERMEABILITÀ ALLO SPORCO E AL GELO, GARANTENDO RESISTENZA AGLI EFFETTI DEL TEMPO, DIFFICILMENTE IMITABILE; NON RILASCIANDO SOSTANZE NOCIVE, È SOSTENIBILE, NON BRUCIA, È RICICLABILE E SI POSA FACILMENTE.

NON MENO TRASCURABILE L'ASPETTO LEGATO ALL'ESTETICA: UN RISULTATO CERTO GRAZIE AGLI INFINITI EFFETTI CHE SI POSSONO CREARE SULLA SUPERFICIE, SEGUENDO I TREND PIÙ CONTEMPORANEI DEL GUSTO E REPLICANDO ALCUNI DEI MATERIALI NATURALI PIÙ DIFFUSI COME IL MARMO, LA PIETRA ED IL LEGNO. IL GRES PORCELLANATO SI COLLOCA COSÌ IN UNO SCENARIO DI AMPIO UTILIZZO; IDEALE PER OGNI TIPOLOGIA DI AMBIENTE, DALLA CUCINA, AL BAGNO, AL SOGGIORNO, A CONTESTI COMMERCIALI E SPAZI ESTERNI.

Ceramics are probably the most versatile material we know. They are ductile, resistant and have an infinite number of uses, formats and finishes. They also offer numerous benefits in terms of technical performance, like low porosity, and extreme resistance to water, dirt, ice and the effects of time that is difficult to imitate. They do not release harmful substances. They do not burn. And they are sustainable, recyclable and easy to lay.

Aesthetics are another important aspect of ceramics as they guarantee great results thanks to the infinite effects their surfaces can create. They adapt easily to contemporary style trends and they can also recreate popular natural materials, like marble, stone and wood. Porcelain stoneware can therefore be used in a vast range of scenarios. It is ideal for every type of environment, from the kitchen and bathroom to the living room and from retail contexts to outdoor spaces.

High
aesthetic valueFrost
resistanceUnchanging
over time

Easy to clean



Easy to lay



Recyclable

— SE PARLIAMO DI **OUTDOOR**, CHE SIA ESSO UN CONTESTO URBANO O UN AMBITO PRIVATO, INNUMEREVOLI SONO I FATTORI CHE METTONO A DURA PROVA LA PAVIMENTAZIONE, CONTINUAMENTE SOGGETTA AL PASSAGGIO DI PERSONE E MEZZI, NONCHÉ AGLI AGENTI ATMOSFERICI QUALI LA PIOGGIA, LA NEVE E LE CONTINUE VARIAZIONI TERMICHE. CON LA SUA STRUTTURA COMPATTA E LA SUA PARTICOLARE RESISTENZA, IL **GRES PORCELLANATO DI IMOLA** DIVENTA COSÌ LA SOLUZIONE IDEALE ANCHE PER UNA CORRETTA E PERMANENTE ISTALLAZIONE IN ESTERNO. UN'OFFERTA COMPLETA DI PAVIMENTI E PEZZI SPECIALI. UN'INTERPRETAZIONE DI PIETRE, LEGNI E CEMENTI, DECLINATA IN UN'AMPIA GAMMA DI FORMATI, COLORI, FINITURE PER LE PIÙ DIVERSIFICATE ESIGENZE DI POSA. TUTTO QUELLO CHE OCCORRE PER **TERRAZZI, GIARDINI, PATII, SCALE D'ACCESSO, GARAGE, PERCORSI PEDONALI E CARRABILI, SIA IN LUOGHI RESIDENZIALI CHE IN LUOGHI COMMERCIALI E DIREZIONALI**. UNA SINTESI UNICA DI RESA ESTETICA E CARATTERISTICHE PERFORMANTI.

— With regard to **outdoor** spaces that can be either urban or private contexts, there are innumerable factors that test flooring to the limit, like continuous stress from footfall and vehicle flow, inclement weather conditions, like rain and snow, and continuous changes in temperature. Thanks to its compact structure and unique resistance, **Imola porcelain stoneware** is the ideal solution for permanent and precise outdoor installations. There is a complete range of floor tiles and special items. And there are stone, wood and cement effects in a wide selection of formats, colours and finishes that can satisfy a vast array of laying requirements. In fact, there is everything you need for **terraces, gardens, patios, access stairs, garages, walkways and drives in residential, retail and executive contexts**. A unique combination of style and high-performance characteristics.



Resiste agli sbalzi termici e alle intemperie

Resistant to sudden changes in temperature and bad weather.



Resiste al frequente passaggio di mezzi e persone

Resistant to frequent footfall and vehicle flow.




Resiste agli attacchi chimici e alle macchie

Resistant to chemical corrosion and stains.



Piena coordinabilità tra indoor e outdoor

Complete coordination between indoors and outdoors.



Piena versatilità estetica e di posa

Complete style and installation versatility.

PRATICO
E FUNZIONALE.

OUTDOOR
best performance


Practical and functional.

Coordina alla perfezione ogni tuo ambiente esterno.

COORDINATE ALL YOUR OUTDOOR ENVIRONMENTS PERFECTLY.

— Solarium, vialetti, aree di parcheggio, scale, bordi piscina, terrazze, aiuole, fioriere e facciate: ogni idea di progetto prende forma con gli elementi coordinati di Imola per l'esterno. Una gamma completa, per plasmare al meglio ogni esigenza, qualsiasi sia la location, la tipologia d'intervento, i dislivelli e le aree che si intendono creare, assicurando così agli ambienti Outdoor funzionalità, versatilità ed estetica per una continuità progettuale infinita.

— Solaria, driveways, parking areas, steps, pool-sides, terraces, flower beds, window boxes, and façades: any design idea can now take shape thanks to Imola's coordinated outdoor elements. This complete range is ready to shape any requirement in the best way possible, whatever the location, type of project, level difference or area to be created, while also ensuring that every outdoor environment is functional, versatile and stylish, and design continuity is infinite.

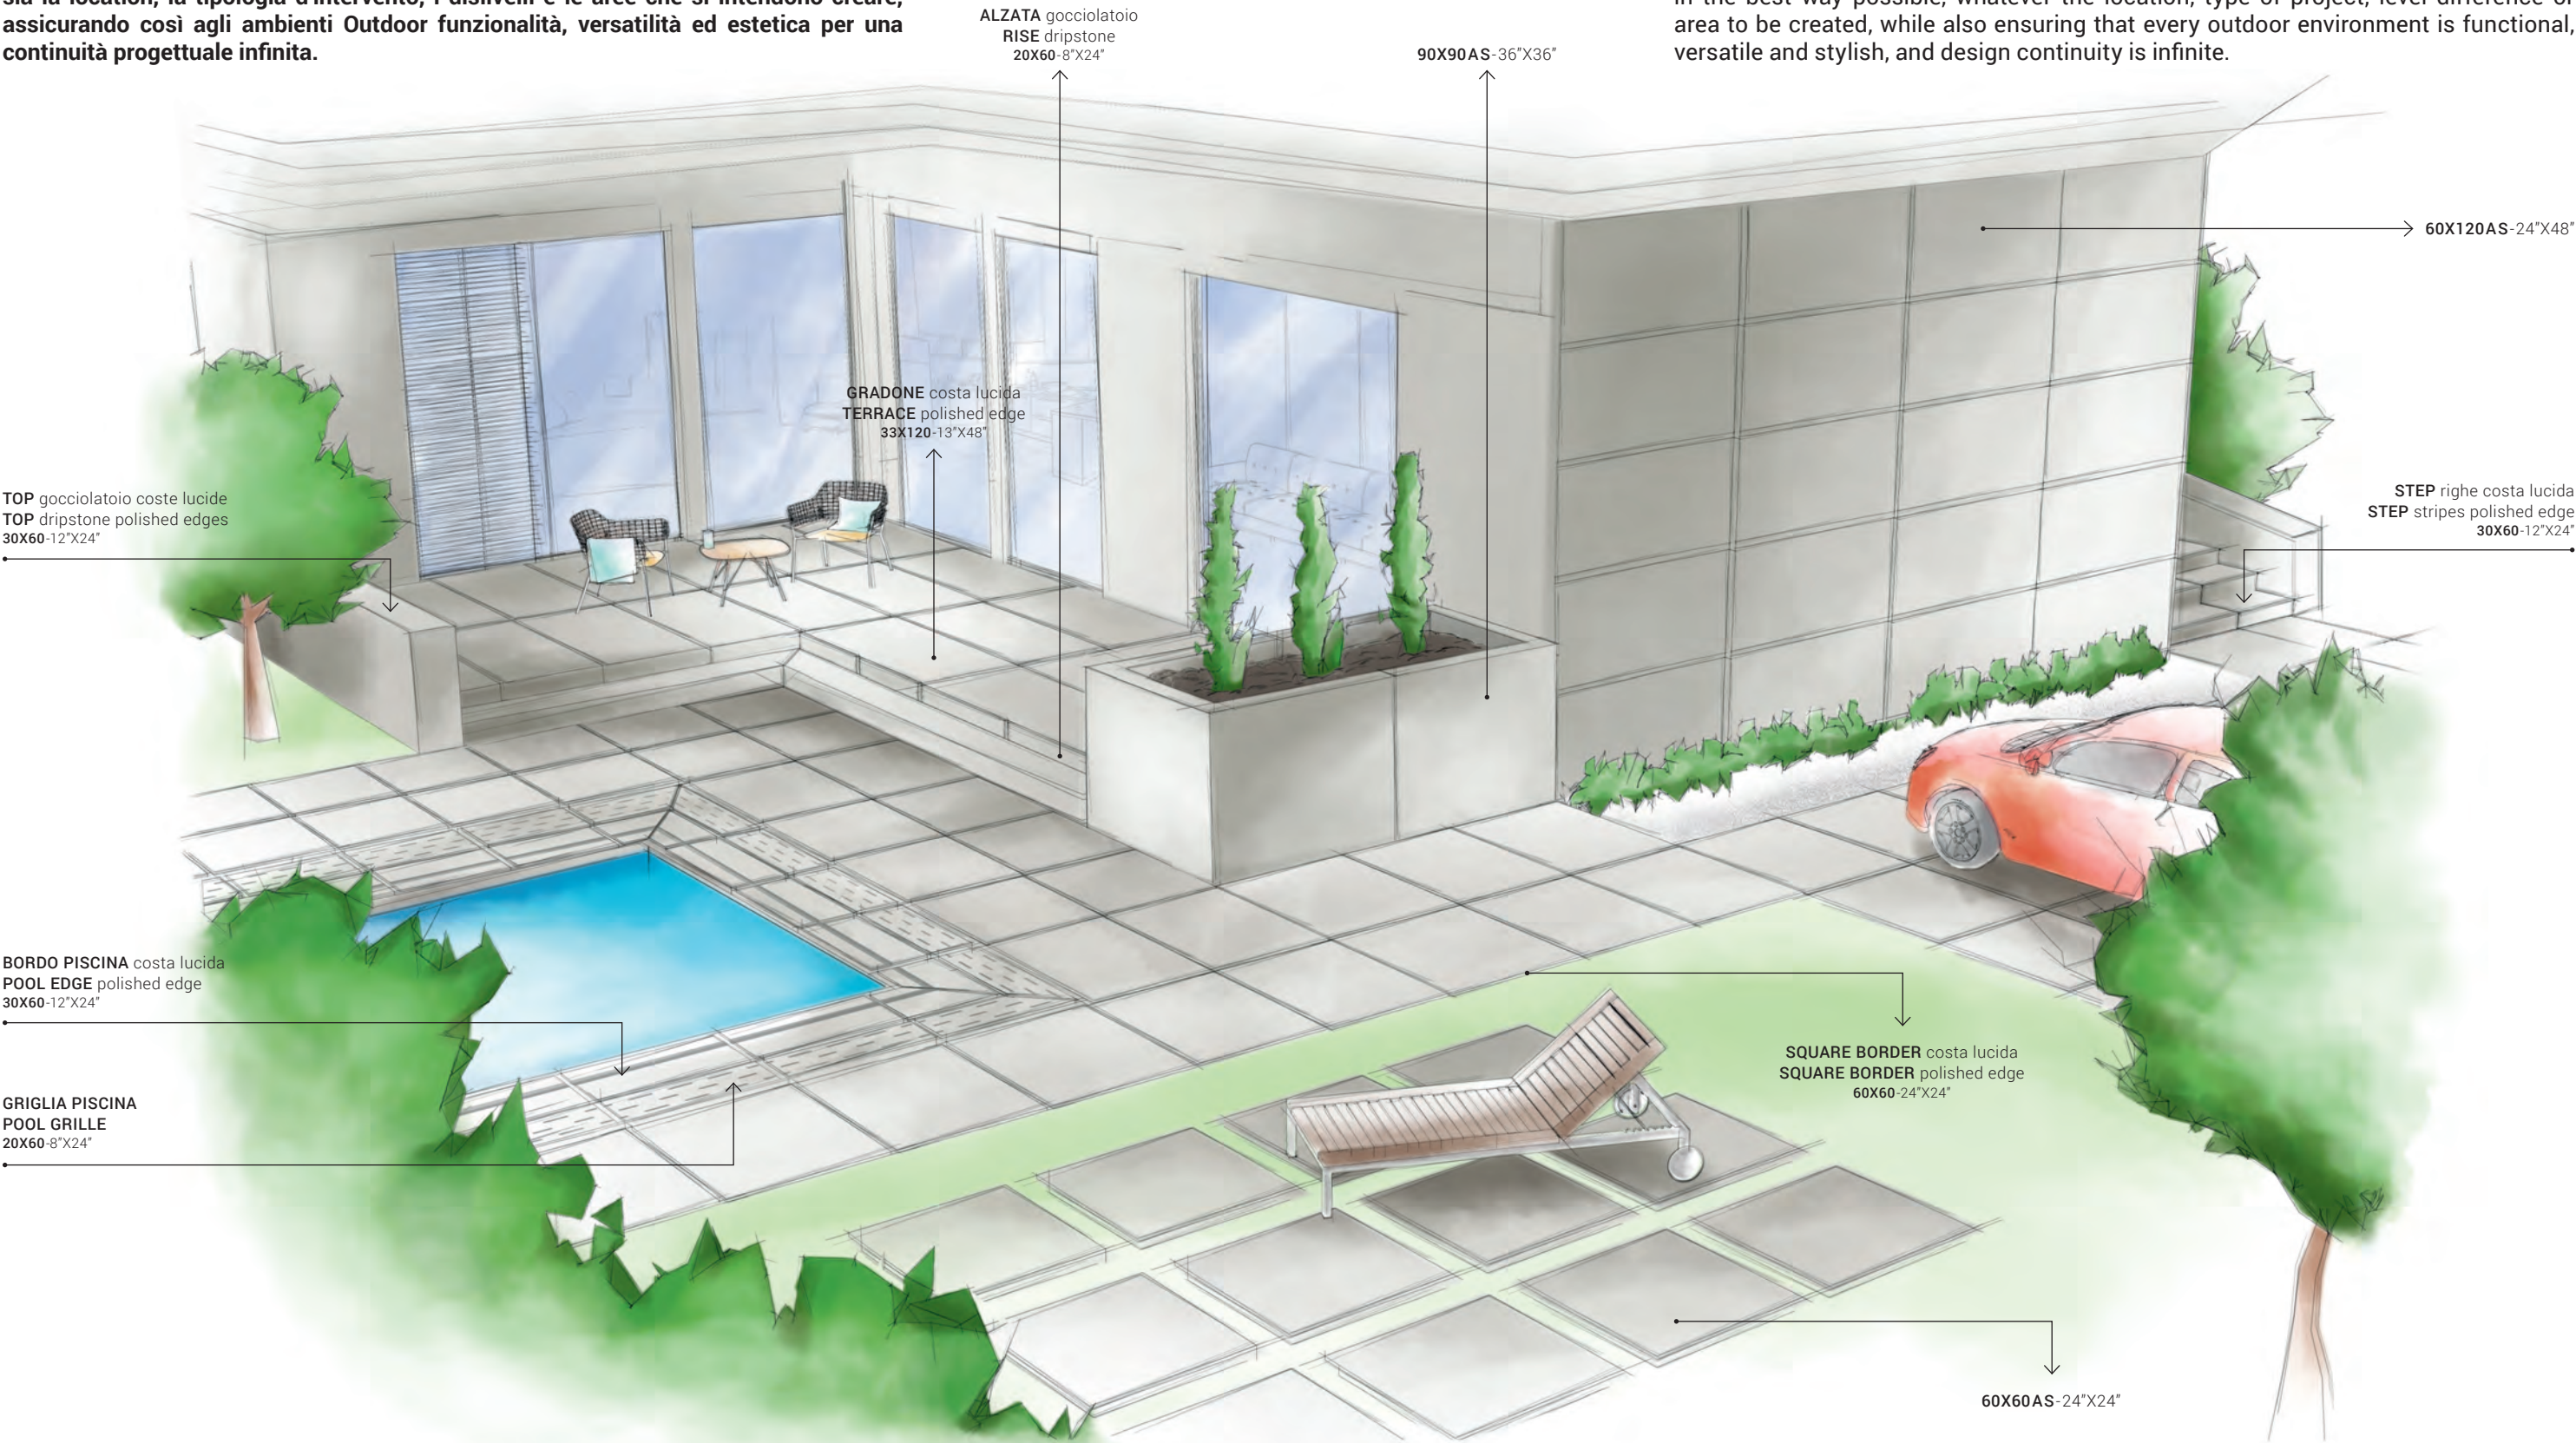

Una scelta in linea con le ultime esigenze dell'abitare e del gardening ove, al tradizionale gres porcellanato da esterno, la proposta si completa con l'alto spessore a 18 mm e 20 mm e da nuovi pezzi speciali, diversificati, per specifici utilizzi.

LA SOLUZIONE IDEALE PER CONTESTI DI OUTDOOR DESIGN.

Sinonimo di alte performance tecniche, quali la durezza, le proprietà meccaniche ed un grado di assorbimento quasi nullo, l'alto spessore è un prodotto solido, ecosostenibile, dallo stile dinamico e contemporaneo, disponibile in una gamma ampia e diversificata di soluzioni estetiche, di colori e di formati.

I VANTAGGI.

- _ Monolitico.
- _ Ecosostenibile.
- _ Igienico.
- _ Ignifugo.
- _ Ingelivo.
- _ Antiscivolo.
- _ Resistente all'usura.
- _ Resistente agli attacchi chimici.
- _ Resistente ai carichi di rottura.
- _ Resistente agli sbalzi termici.
- _ Resistente alle macchie.
- _ Inattaccabile da muffe e muschi.
- _ Facile da pulire.
- _ Facile da posare.
- _ Facile da rimuovere.

A choice made in line with the latest living and gardening demands, where traditional porcelain stoneware for outdoors is now joined by a thicker 18 mm and 20 mm tile and new special pieces for specific purposes.

THE IDEAL SOLUTION FOR OUTDOOR DESIGN CONTEXTS.

A byword for hi-tech performance, thanks to its durability, mechanical properties and almost zero absorption, the high thickness tile is a solid, eco-sustainable product with a dynamic, contemporary style, available in a vast and diverse range of aesthetic solutions, colours and shapes.

THE BENEFITS.

- _ Monolithic.
- _ Eco-sustainable.
- _ Hygienic.
- _ Fireproof.
- _ Frost-proof.
- _ Skid-proof.
- _ Resistant to wear.
- _ Resistant to chemical corrosion.
- _ Resistant to tensile strength.
- _ Resistant to sudden changes in temperature.
- _ Stain resistant.
- _ Resistant to mould and moss.
- _ Easy to clean.
- _ Easy to lay.
- _ Easy to remove.



OUTDOOR
20 mm
THICKNESS





azuma rock™	— 22
azuma up™	— 26
azuma™	— 30
blox	— 34
closer	— 38
crew bitter	— 42
crew honey	— 46
crew umami	— 50
elixir	— 54
mother™	— 58
stoncrete	— 62
the rock™	— 66
trail™	— 70
vibes	— 96
x-rock	— 100

soluzioni di posa	— 104
LAYING SOLUTIONS	




OUTDOOR — 18 mm - 20 mm —

18



trail™	TCOT EMI	●	●		
	TCOT TOS	●	●		
	MXST BIA	●	●		
	MXST GRE	●	●		
	QUAR BIA	●	●	●	●
	QUAR GRI	●	●	●	●
	PIAS GRE	●	●	●	●
	PORF MIX	●	●	●	●

20

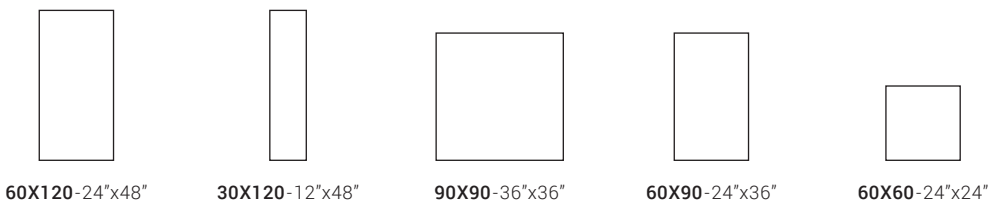

azuma rock™	S			●	●
	AV			●	●
	W			●	●
	CG			●	●
	AG			●	●
	G			●	●
azuma up™	AV			●	●
	S			●	●
	NO			●	●
azuma™	CG			●	●
	G			●	●
	DG			●	●
blox	BS			●	●
	B			●	●
	AG			●	●
	G			●	●





PEZZI SPECIALI / SPECIAL PIECES

20X30 -8\"X12\"	20X20X4 -8\"X8\"X1,6\"	20X30X4 -8\"X12\"X1,6\"	20X30X4 -8\"X12\"X1,6\"	20X20X4 -8\"X8\"X1,6\"
SQUARE BORDER costa lucida SQUARE BORDER polished edge	ELEMENTO A L* L- SHAPED*	ELEMENTO A L* L- SHAPED*	ELEMENTO A L MODUL L- SHAPED MODUL	ELEMENTO A L* L- SHAPED*
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●

PEZZI SPECIALI / SPECIAL PIECES


60X60 -24\"x24\"	90X90 -36\"x36\"	33X60 -13\"X24\"	33X90 -13\"X36\"
SQUARE BORDER costa lucida SQUARE BORDER polished edge	SQUARE BORDER costa lucida SQUARE BORDER polished edge	GRADONE costa lucida TERRACE polished edge	GRADONE costa lucida TERRACE polished edge
●	●	●	
●	●	●	
●	●	●	
●	●	●	
●	●	●	
●	●	●	
●	●	●	
●	●	●	
●	●	●	
●	●	●	
●	●	●	
●	●	●	
●	●	●	
●	●	●	

OUTDOOR _____ **18 mm - 20 mm** _____



closer	GB				●	
	W				●	
	AV				●	
	B				●	
	BS				●	
crew bitter	A			●		
	B			●		
	TO			●		
crew honey	B		●			
	BS		●			
	NO		●			
crew umami	A					●
	B					●
	TO					●
elixir	A		●			
	BS		●			
	NO		●			
mother™	CANAPA		●			
	COGNAC		●			
	CUOIO		●			
	MALTO		●			
	MIRRA		●			
	UNIQUE		●			
stoncrete	CG	●				●
	G	●				●
	DG	●				●
the rock™	BRECAP			●		
	FIBOSC			●		
	FOGOLD			●		
	GREINV			●		
	NEGRES			●		
	SOAPST			●		
	ARDESI			●		
	TRARGE			●		
	BORVEN			●		
	MACAUB			●		
	DORSET			●		
	PIASEN			●		
	BREIMP			●		

PEZZI SPECIALI / SPECIAL PIECES



SQUARE BORDER costa lucida
SQUARE BORDER polished edge



SQUARE BORDER costa lucida
SQUARE BORDER polished edge




GRADONE costa lucida
TERRACE polished edge



GRADONE costa lucida
TERRACE polished edge

[illegible]

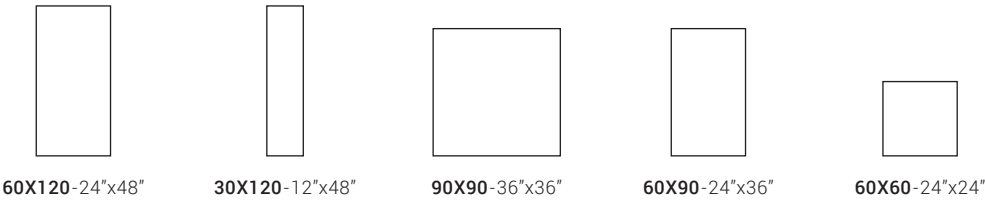


trail™	TCOT EMI				●	●
	TCOT TOS				●	●
	MXST BIA				●	●
	MXST GRE				●	●
	QUAR BIA				●	●
	QUAR GRI				●	●
	PIAS GRE				●	●
	PORF MIX				●	●
vibes	BS				●	●
	B				●	●
	W				●	●
	G				●	●
	DG				●	●
x-rock	B	●				●
	W	●				●
	G	●				●
	N	●				●

PEZZI SPECIALI / SPECIAL PIECES

60X60-24"x24"	90X90-36"x36"	33X60-13"x24"	33X90-13"x36"
SQUARE BORDER costa lucida SQUARE BORDER polished edge	SQUARE BORDER costa lucida SQUARE BORDER polished edge	GRADONE costa lucida TERRACE polished edge	GRADONE costa lucida TERRACE polished edge
●		●	
●		●	
●		●	
●		●	
●		●	
●		●	
●		●	
●		●	
●		●	
●		●	●
●		●	●
●		●	●
●		●	●
●		●	●
●		●	
●		●	
●		●	
●		●	


OUTDOOR _____ **18 mm - 20 mm** _____

PEZZI SPECIALI / SPECIAL PIECES




33X120-13"X48"

GRADONE costa lucida
TERRACE polished edge



30X120-12"X48"

GRADONE costa lucida
TERRACE polished edge




30x60x5-12"X24"x2"

ELEMENTO A ELLE L-SHAPED




30x90x5-12"X36"x2"

ELEMENTO A ELLE
L-SHAPED



30X60-12"X24"

BORDO PISCINA costa lucida
POOL EDGE polished edge



20X60-8"X24"

GRIGLIA PISCINA
POOL GRILLE



azuma rock™	S			●
	AV			●
	W			●
	CG			●
	AG			●
	G			●
azuma up™	AV			●
	S			●
	NO			●
azuma™	CG			●
	G			●
	DG			●
blox	BS			●
	B			●
	AG			●
	G			●
crew bitter	A			
	B			
	TO			
crew honey	B		●	
	BS		●	
	NO		●	
crew umami	A			●
	B			●
	TO			●
elixir	A		●	
	BS		●	
	NO		●	
mother	CANAPA		●	
	COGNAC		●	
	CUOIO		●	
	MALTO		●	
	MIRRA		●	
	UNIQUE		●	
stoncrete	CG	●		●
	G	●		●
	DG	●		●


[illegible]

20



30x60x5-12"X24"x2"

ELEMENTO A ELLE L-SHAPED



BORDO PISCINA costa lucida
POOL EDGE polished edge

GRIGLIA PISCINA
POOL GRILLE

[illegible]

21 _

— Azuma Rock™ un nuovo concentrato di skills, con il giusto balance tra tecnica ed estetica, ed un intento chiaro: aggiungere nuove istanze all'oramai noto mondo di Azuma.

— Azuma Rock™ is a new concentration of skills with the right balance between technique and look, and with one clear goal: to provide new examples of the already well-known Azuma.



1 A.ROCK R12AG RM
60X120-24"X48"



2 A.ROCK 60AG ASRM
60X60-24"X24"



3 A.RCK 60CG ASRM
60X60-24"X24"



4 A.RCK GP60CG AS
20X60-8"X24"




5 A.RCK BP60CG AS
30X60-12"X24"




azuma rock™

COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G BIa


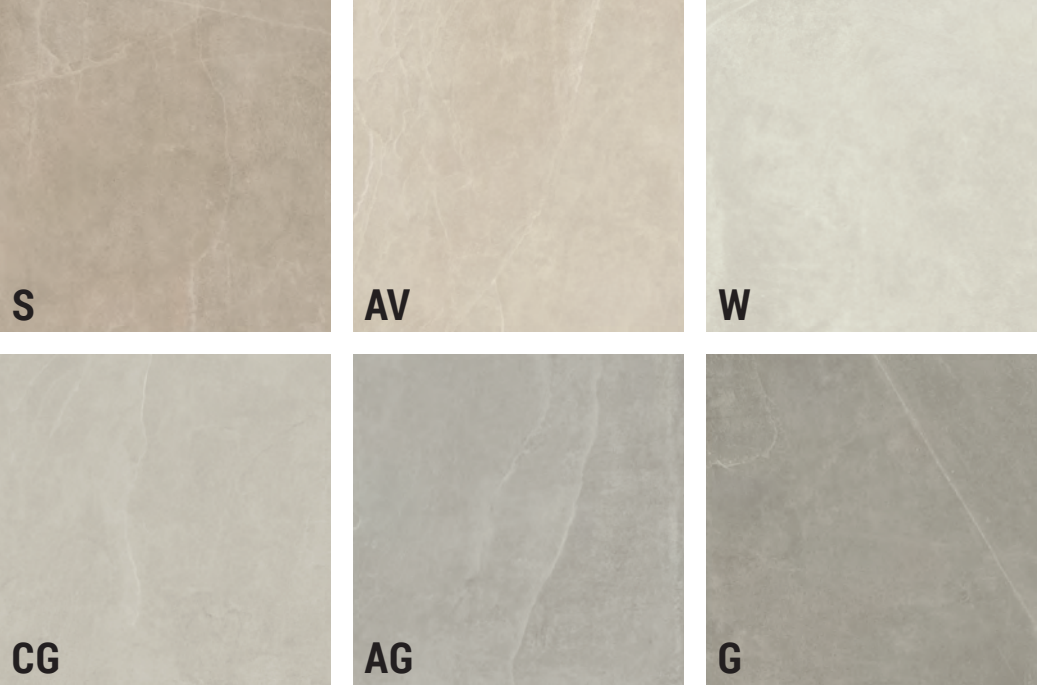


N





		
	90X90-36"x36"	60X60-24"X24"
S	A.ROCK 90S ASRM 193250	A.ROCK 60S ASRM 193236
AV	A.ROCK 90AV ASRM 193246	A.ROCK 60AV ASRM 193232
W	A.ROCK 90W ASRM 193251	A.ROCK 60W ASRM 193237
CG	A.ROCK 90CG ASRM 193248	A.ROCK 60CG ASRM 193234
AG	A.ROCK 90AG ASRM 193247	A.ROCK 60AG ASRM 193233
G	A.ROCK 90G ASRM 193249	A.ROCK 60G ASRM 193235

PEZZI SPECIALI / SPECIAL PIECES

N

	 SQUARE BORDER costa lucida SQUARE BORDER polished edge 60X60-24"X24"  	 SQUARE BORDER costa lucida SQUARE BORDER polished edge 90X90-36"x36"  	 GRADONE costa lucida TERRACE polished edge 33X60-13"X24"  
S	A.ROCK SB60S AS 194397	A.ROCK SB90S AS 194403	A.ROCK GR336S AS 194409
AV	A.ROCK SB60AV AS 194393	A.ROCK SB90AV AS 194399	A.ROCK GR336AVAS 194405
W	A.ROCK SB60W AS 194398	A.ROCK SB90W AS 194404	A.ROCK GR336W AS 194410
CG	A.ROCK SB60CG AS 194395	A.ROCK SB90CGAS 194401	A.ROCK GR336CG AS 194407
AG	A.ROCK SB60AG AS 194394	A.ROCK SB90AG AS 194400	A.ROCK GR336AGAS 194406
G	A.ROCK SB60G AS 194396	A.ROCK SB90G AS 194402	A.ROCK GR336G AS 194408

N

	 ELEMENTO A ELLE L-SHAPED 30x60x5-12"X24"x2"  	 ELEMENTO A ELLE L-SHAPED 30x90x5-12"X36"x2"  	 BORDO PISCINA costa lucida POOL EDGE polished edge 30X60-12"X24"  	 GRIGLIA PISCINA POOL GRILLE 20X60-8"X24"  
S	A.ROCK L 60S AS 194415	A.ROCK L 90S AS 194421	A.ROCK BP60S AS 194427	A.ROCK GP60S AS 194433
AV	A.ROCK L 60AV AS 194411	A.ROCK L 90AV AS 194417	A.ROCK BP60AV AS 194423	A.ROCK GP60AV AS 194429
W	A.ROCK L 60W AS 194416	A.ROCK L 90W AS 194422	A.ROCK BP60W AS 194428	A.ROCK GP60W AS 194434
CG	A.ROCK L 60CG AS 194413	A.ROCK L 90CG AS 194419	A.ROCK BP60CG AS 194425	A.ROCK GP60CG AS 194431
AG	A.ROCK L 60AG AS 194412	A.ROCK L 90AG AS 194418	A.ROCK BP60AG AS 194424	A.ROCK GP60AG AS 194430
G	A.ROCK L 60G AS 194414	A.ROCK L 90G AS 194420	A.ROCK BP60G AS 194426	A.ROCK GP60G AS 194432

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
A.RCK AS 	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.



Angolari DX e SX disponibili a richiesta.
RH and LH angle bracket available on request.


— Azuma Up™: un'ampia proposta di formati a partire dalla lastra 120x278 cm, ai suoi sottomultipli, alle soluzioni da esterno, nello spessore tradizionale e nella versione a 20 mm, per possibilità compositive crossover tra ambienti indoor e outdoor, per ogni contesto e destinazione.

— Azuma Up™: a vast offering of sizes starting with the 120x278 cm slab, its sub-multiples, solutions for outside, in the traditional thickness and 20 mm version, for crossover compositional options between indoor and outdoor environments, for every context and use.





N



90X90-36"x36"



60X60-24"x24"


AV	A.UP 90AV AS RM 177719	A.UP 60AV AS RM 177728
S	A.UP 90S AS RM 177723	A.UP 60S AS RM 177729
NO	A.UP 90NO AS RM 177724	A.UP 60NO AS RM 177730

PEZZI SPECIALI / SPECIAL PIECES


N



SQUARE BORDER costa lucida
SQUARE BORDER polished edge
60X60-24"x24"  



SQUARE BORDER costa lucida
SQUARE BORDER polished edge
90X90-36"x36"  



GRADONE costa lucida
TERRACE polished edge
33X60-13"x24"  

AV	A.UP SB60AV AS 179448	A.UP SB90AV AS 179451	A.UP GR336AV AS 179458
S	A.UP SB60S AS 179449	A.UP SB90S AS 179452	A.UP GR336S AS 179459
NO	A.UP SB60NO AS 179450	A.UP SB90NO AS 179453	A.UP GR336NO AS 179460


N




ELEMENTO A ELLE
L-SHAPED
30x60x5-12"x24"x2"  



ELEMENTO A ELLE
L-SHAPED
30x90x5-12"x36"x2"  



BORDO PISCINA costa lucida
POOL EDGE polished edge
30X60-12"x24"  



GRIGLIA PISCINA
POOL GRILLE
20X60-8"x24"  

AV	A.UP L 60AV AS 182061	A.UP L 90AV AS 181828	A.UP BP60AV AS 179512	A.UP GP60AV AS 179523
S	A.UP L 60S AS 182063	A.UP L 90S AS 181830	A.UP BP60S AS 179515	A.UP GP60S AS 179526
NO	A.UP L 60NO AS 182062	A.UP L 90NO AS 181829	A.UP BP60NO AS 179514	A.UP GP60NO AS 179525

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
A.UP AS	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.

Angolari DX e SX disponibili a richiesta.
RH and LH angle bracket available on request.

— Azuma™ è la materializzazione di una nuova filosofia di design che si ispira al modo del tutto particolare di concepire i luoghi dell’abitare, e la stessa idea di spazialità, in Giappone. A partire dalla suggestione materica, Imola rimanda all’uso che alcune correnti architettoniche del paese hanno fatto del cemento per proporre soluzioni radicalmente innovative e al tempo stesso pienamente calate in una tradizione millenaria.

— Azuma™ is the embodiment of a new design philosophy inspired by Japan and its unique concept of space and residential design. Based on the complex material character of concrete, Imola offers solutions that are radically innovative while also being steeped in traditions stretching back thousands of years. All this is expressed in a ceramic product that represents a harmonious synthesis of industrial precision and craftsman-like care, solidity and lightness, carefully researched functionality and aesthetic inspiration.



1 AZMA 60CG AS RM
60X60-24"X24"



2 AZMA BP60CG AS
60X60-24"X24"



3 AZMA GP60CG AS
30X60-12"X24"




4 AZMA 90G AS RM
90X90-36"X36"




5 AZMA SB90G AS
90X90-36"X36"



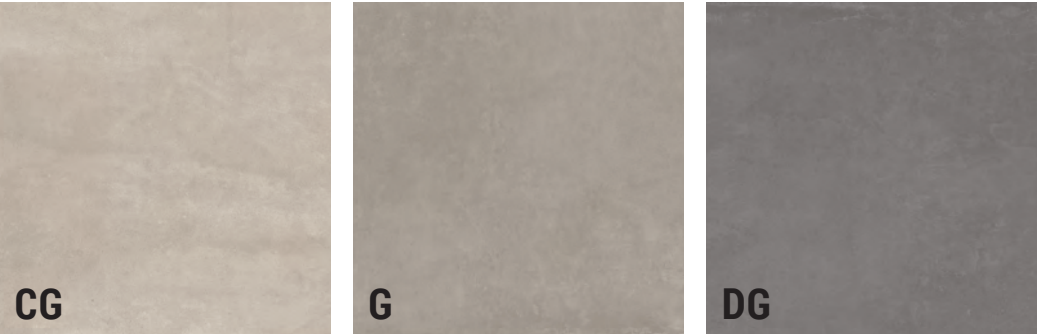

N



90X90-36"x36"

N




60X60-24"x24"

CG	AZMA 90CG AS RM 173106	AZMA 60CG AS RM 173103
G	AZMA 90G AS RM 173108	AZMA 60G AS RM 173104
DG	AZMA 90DG AS RM 173109	AZMA 60DG AS RM 173105


PEZZI SPECIALI / SPECIAL PIECES

N




SQUARE BORDER costa lucida
SQUARE BORDER polished edge
60X60-24"x24"  

N



SQUARE BORDER costa lucida
SQUARE BORDER polished edge
90X90-36"x36"  


N



GRADONE costa lucida
TERRACE polished edge
33X60-13"x24"  


CG	AZMA SB60CG AS 176224	AZMA SB90CG AS 176315	AZMA GR336CG AS 176227
G	AZMA SB60G AS 176225	AZMA SB90G AS 176316	AZMA GR336G AS 176228
DG	AZMA SB60DG AS 176226	AZMA SB90DG AS 176317	AZMA GR336DG AS 176229

N




ELEMENTO A ELLE
L-SHAPED
30x60x5-12"x24"x2"  

N




ELEMENTO A ELLE
L-SHAPED
30x90x5-12"x36"x2"  

N



BORDO PISCINA costa lucida
POOL EDGE polished edge
30X60-12"x24"  

N



GRIGLIA PISCINA
POOL GRILLE
20X60-8"x24"  

CG	AZMA L 60CG AS 182051	AZMA L 90CG AS 181821	AZMA BP60CG AS 176239	AZMA GP60CG AS 176242
G	AZMA L 60G AS 182053	AZMA L 90G AS 181823	AZMA BP60G AS 176240	AZMA GP60G AS 176243
DG	AZMA L 60DG AS 182054	AZMA L 90DG AS 181822	AZMA BP60DG AS 176241	AZMA GP60DG AS 176244

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
AZMA AS	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.

Angolari DX e SX disponibili a richiesta.
RH and LH angle bracket available on request.



BLOX 90B AS RM
90X90-36"X36"



— Una polvere finemente macinata di elementi presenti in natura quali gesso, silicati, minerali che, a contatto con l'acqua si modifica, pur mantenendo e manifestando sulla propria superficie la sua genesi. Tante le sfumature intrappolate in un materiale che oggi è diventato il simbolo per eccellenza della modernità, visibile sia nei contesti urbani che come soluzione estetica per progetti residenziali da esterno.

— This finely ground mixture of natural elements, such as gypsum, silicates and minerals is transformed on contact with water, but maintains and reveals its origins on the surface. There are so many different shades trapped in this material that, today, it has become a symbol for modern excellence and is deliberately exposed in urban contexts as an element of residential outdoor design.




1 BLOX 60AG AS RM
60X60-24"X24"



2 BLOX 60G AS RM
60X60-24"X24"



CONFORME / ACCORDING TO
UNI EN 14411 - G BIa

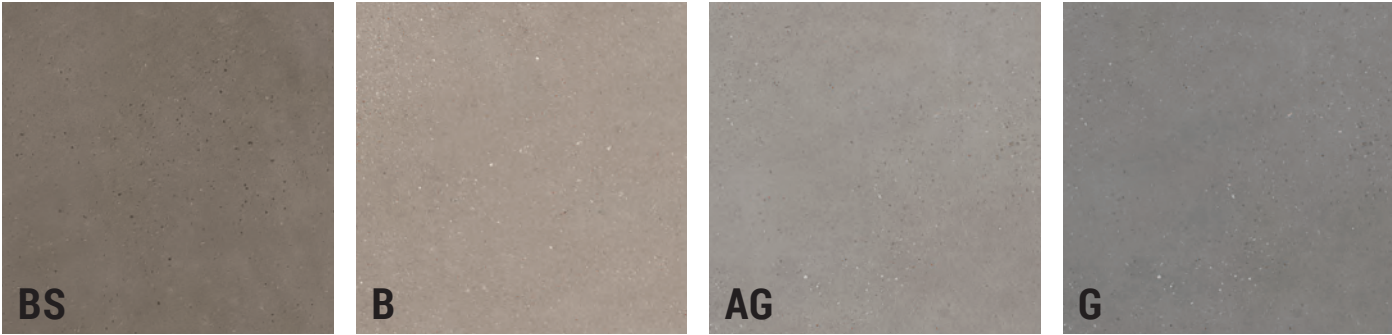

N

90X90-36"X36"

60X60-24"X24"

BS	BLOX 90BS AS RM 175610	BLOX 60BS AS RM 175606
B	BLOX 90B AS RM 175611	BLOX 60B AS RM 175607
AG	BLOX 90AG AS RM 175612	BLOX 60AG AS RM 175608
G	BLOX 90G AS RM 175613	BLOX 60G AS RM 175609

PEZZI SPECIALI / SPECIAL PIECES

N

SQUARE BORDER costa lucida
SQUARE BORDER polished edge
60X60-24"X24"

△

2

SQUARE BORDER costa lucida
SQUARE BORDER polished edge
90X90-36"x36"

△

1

GRADONE costa lucida
TERRACE polished edge
33X60-13"X24"

△

4

BS	BLOX SB60BS AS 176283	BLOX SB90BS AS 176313	BLOX GR336BS AS 176288
B	BLOX SB60B AS 176284	BLOX SB90B AS 176314	BLOX GR336B AS 176289
AG	BLOX SB60AG AS 176281	BLOX SB90AG AS 176311	BLOX GR336AG AS 176286
G	BLOX SB60G AS 176282	BLOX SB90G AS 176312	BLOX GR336G AS 176287

N

ELEMENTO A ELLE
L-SHAPED
30x60x5-12"X24"x2"

△

2

ELEMENTO A ELLE
L-SHAPED
30x90x5-12"X36"x2"

△

2

BORDO PISCINA costa lucida
POOL EDGE polished edge
30X60-12"X24"

△

4

GRIGLIA PISCINA
POOL GRILLE
20X60-8"X24"

△

2

BS	BLOX L 60BS AS 182057	BLOX L 90BS AS 181826	BLOX BP60BS AS 176305	BLOX GP60BS AS 176309
B	BLOX L 60B AS 182056	BLOX L 90B AS 181825	BLOX BP60B AS 176306	BLOX GP60B AS 176310
AG	BLOX L 60AG AS 182055	BLOX L 90AG AS 181824	BLOX BP60AG AS 176303	BLOX GP60AG AS 176307
G	BLOX L 60G AS 182058	BLOX L 90G AS 181827	BLOX BP60G AS 176304	BLOX GP60G AS 176308

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
BLOX AS	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.

Angolari DX e SX disponibili a richiesta.
RH and LH angle bracket available on request.

_ 36

37 _

OUTDOOR — 18 mm - 20 mm



CLOSER 69BS AS
60X90 - 24"X36"


— Autenticità del look pietra, espressione di un appeal spontaneo e confortevole. E innovazione di un design che prende spunto da diverse rocce per calibrare una proposta tanto fedele alla materia di ispirazione quanto inedita, perché irreperibile in natura. Un cortocircuito tra intuizioni ed emozioni: sincera meraviglia al servizio di appaganti visioni architettoniche.

— Closer offers an authentic stone look, expressing spontaneous appeal and comfort. Its design innovation draws on a range of reference models to calibrate a product that is both faithful to the material that inspires it and completely unprecedented as it cannot be found in nature. A short circuit between intuition and emotion: this is sincere wonder gratifying architectural visions.



1 CLOSER 90B
90X90 - 36"X36"

2 CLOSER 69B AS
60X90 - 24"X36"

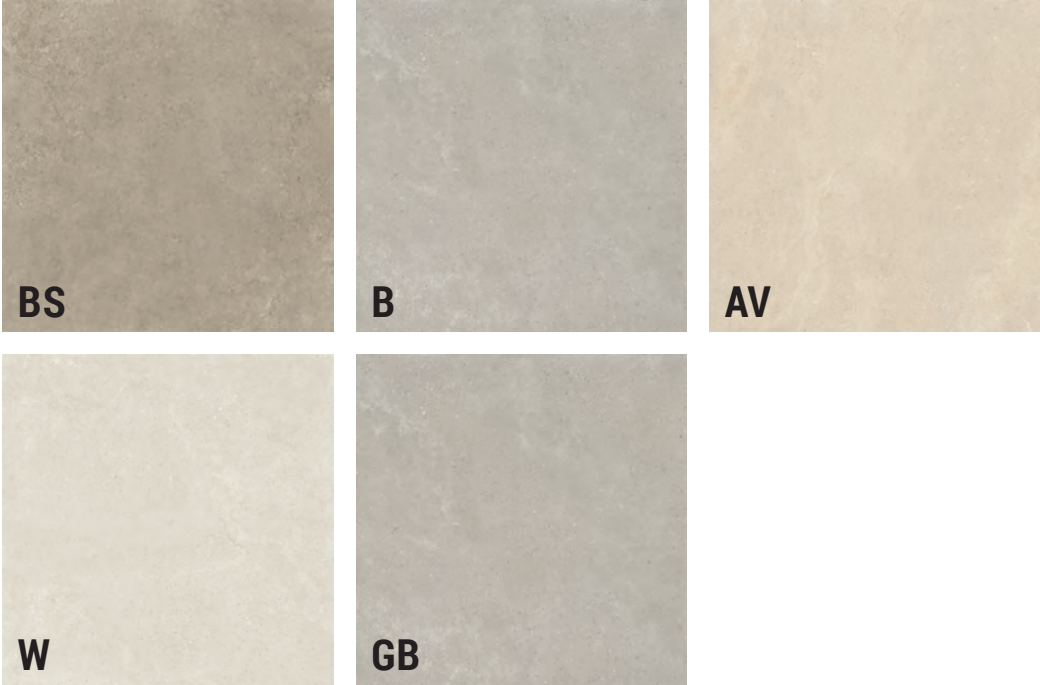


N



60X90-24"X36"

BS	CLOSER 69BS AS 200779
B	CLOSER 69B AS 200778
AV	CLOSER 69AV AS 200777
W	CLOSER 69W AS 200776
GB	CLOSER 69GB AS 200775

PEZZI SPECIALI / SPECIAL PIECES



GRADONE costa lucida
TERRACE polished edge
33X90-13"X36"  

BS	CLOSERGR339BSAS 200845
B	CLOSERGR339BAS 200844
AV	CLOSERGR339AVAS 200843
W	CLOSERGR339WAS 200842
GB	CLOSERGR339GBAS 200841

OUTDOOR — 18 mm - 20 mm

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
COSER AS	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.

Angolari DX e SX disponibili a richiesta.
RH and LH angle bracket available on request.

— Crew Bitter. L'attenta selezione dei materiali "naturali" di riferimento ha portato alla nascita di questo progetto che unisce materiali distinti come la terracotta (Umami), la pietra mediterranea (Bitter) ed il legno naturale (Honey) in un unico contenitore: Crew.

— Crew Bitter. The careful selection of relevant "natural" materials led to the creation of this project which combines sophisticated materials like terracotta (Umami), Mediterranean stone (Bitter) and natural wood (Honey) in a single container: Crew.



CR BIT 90B ASRM
90X90-36"X36"



1 CR BIT 90B ASRM
90X90-36"X36"




2 CR BIT L90B AS
30X90X5-12"X36"X2"



crew bitter

COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G Bla

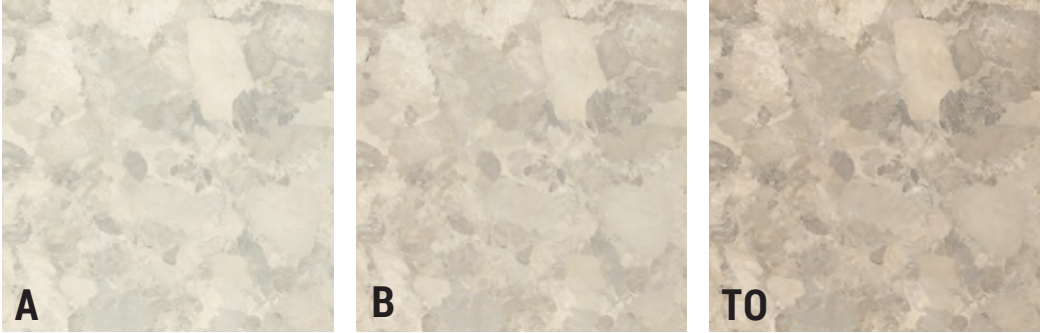

N

90X90-36"x36"

A	CR BIT 90A ASRM 190675
B	CR BIT 90B ASRM 190676
TO	CR BIT 90TOASRM 190677

PEZZI SPECIALI / SPECIAL PIECES

N

SQUARE BORDER costa lucida
SQUARE BORDER polished edge
90x90-36"x36"

ELEMENTO A ELLE
L-SHAPED
30x90x5-12"x36"x2"

A	CR BIT SB90A AS 191133	CR BIT L90A AS 191136
B	CR BIT SB90B AS 191134	CR BIT L90B AS 191137
TO	CR BIT SB90TOAS 191135	CR BIT L90TO AS 191138

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
CR BIT AS	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.

Angolari DX e SX disponibili a richiesta.
RH and LH angle bracket available on request.

— Crew Honey. L'attenta selezione dei materiali "naturali" di riferimento ha portato alla nascita di questo progetto che unisce materiali distinti come la terracotta (Umami), la pietra mediterranea (Bitter) ed il legno naturale (Honey) in un unico contenitore: Crew.

— Crew Honey. The careful selection of relevant "natural" materials led to the creation of this project which combines sophisticated materials like terracotta (Umami), Mediterranean stone (Bitter) and natural wood (Honey) in a single container: Crew.



CR HO3012BASRM
30X120-12"X48"



CR HO R2012BSRM
30X120-12"X48"

crew honey

COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G BIa



N

30x120 - 12"x48"

A	CR HO3012BASRM 190759
BS	CR HO3012BSASRM 190760
NO	CR HO3012NOASRM 190761

PEZZI SPECIALI / SPECIAL PIECES

N

GRADONE costa lucida
TERRACE polished edge
30X120-12"X48" $\triangle$

1

A	CR HOGR3012BAS 191449
BS	CR HOGR3012BSAS 191450
NO	CR HOGR3012NOAS 191451

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
CR HON AS	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.



OUTDOOR — 18 mm - 20 mm

Angolari DX e SX disponibili a richiesta.
RH and LH angle bracket available on request.

— Crew Umami. L'attenta selezione dei materiali "naturali" di riferimento ha portato alla nascita di questo progetto che unisce materiali distinti come la terracotta (Umami), la pietra mediterranea (Bitter) ed il legno naturale (Honey) in un unico contenitore: Crew.

— Crew Umami. The careful selection of relevant "natural" materials led to the creation of this project which combines sophisticated materials like terracotta (Umami), Mediterranean stone (Bitter) and natural wood (Honey) in a single container: Crew.



CR UMA R120B RM
120X120-48"X48"



1 CR UMA R120B RM
120X120-48"X48"



2 CR UMA 120B RM
120X120-48"X48"



crew umami

COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G BIa



N

60X60-24"X24"

A	CR UMA 60A ASRM 190733
B	CR UMA 60B ASRM 190734
TO	CR UMA 60TOASRM 190735

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
CR UMA AS	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.



PEZZI SPECIALI / SPECIAL PIECES

N

	SQUARE BORDER costa lucida SQUARE BORDER polished edge 60X60-24"X24" Δ 2	BORDO PISCINA costa lucida POOL EDGE polished edge 30X60-12"X24" Δ 4	GRADONE costa lucida TERRACE polished edge 33X60-13"X24" Δ 4
A	CR UMA SB60AAS 191380	CR UMA BP60A AS 191417	CR UMAGR336AAS 191404
B	CR UMA SB60BAS 191381	CR UMA BP60B AS 191418	CR UMAGR336BAS 191405
TO	CR UMA SB60TOAS 191382	CR UMA BP60TOAS 191419	CR UMAGR336TOAS 191406

N

	ELEMENTO A ELLE L-SHAPED 30x60x5-12"X24"x2" Δ 2	GRIGLIA PISCINA POOL GRILLE 20X60-8"X24" Δ 2
A	CR UMA L60A AS 191423	CR UMA GP60A AS 191420
B	CR UMA L60B AS 191424	CR UMA GP60B AS 191421
TO	CR UMA L60TO AS 191425	CR UMA GP60TOAS 191422

Angolari DX e SX disponibili a richiesta.
RH and LH angle bracket available on request.

OUTDOOR — 18 mm - 20 mm

— Elixir, un look contemporaneo, nella sua piena essenza lignea, e moderno nella sua estetica, è coordinabile anche in contesti outdoor con il listone a formato 30x120 cm e lo spessore 20 mm.

— Elixir, a contemporary look, in its full wooden essence and modern aesthetics. It can be coordinated in outdoor contexts in the 30x120 cm strip with a thickness of 20 mm.



ELXR3012NO ASRM
30X120-12"X48"

1 ELXR3012NO ASRM
30X120-12"X48"

2 ELXR GR3012NOAS
30X120-12"X48"




N

30x120 - 12"x48"

A	ELXR3012A ASRM 183352
BS	ELXR3012BS ASRM 183353
NO	ELXR3012NO ASRM 183354

PEZZI SPECIALI / SPECIAL PIECES

N



GRADONE costa lucida
TERRACE polished edge
30X120-12"X48"  

A	ELXR GR3012A AS 183358
BS	ELXR GR3012BSAS 183359
NO	ELXR GR3012NOAS 183360

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
ELIXIR AS	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.

Angolari DX e SX disponibili a richiesta.
RH and LH angle bracket available on request.

— Mother™ restituisce il soffio vitale del legno con una delicata sensibilità, tanto sincera nella trama di nuance e venature che si disegnano sulle superfici, quanto avvolgente nei sei colori che restituiscono altrettante gradazioni della materia ispirativa. Il risultato è un abbraccio di design: naturalezza che nutre e ci mette in connessione profonda con gli spazi del vivere.

— Mother™ restores the living breath of wood with delicate sensitivity. The combination of nuances and veining that decorates its surfaces is both snug and sincere, and its six colours offer six different shades of the material that has inspired them. The result is a design embrace. A natural spirit that nourishes and creates a deep connection with living spaces.



1 MALTO SL3012AS
30X120-12"X48"

2 MALTO GR3012AS
30X120-12"X48"



MALTO SL3012AS
30X120-12"X48"



30X120-12"X48"


CANAPA	CANAPA SL3012AS 200490
UNIQUE	UNIQUE SL3012AS 200491
MALTO	MALTO SL3012AS 200492
MIRRA	MIRRA SL3012AS 200493
CUOIO	CUOIO SL3012AS 200494
COGNAC	COGNAC SL3012AS 200495

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
MOTHER AS	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.

PEZZI SPECIALI / SPECIAL PIECES



GRADONE costa lucida
TERRACE polished edge
30X120-12"X48"  

CANAPA	CANAPA GR3012AS 200496
UNIQUE	UNIQUE GR3012AS 200497
MALTO	MALTO GR3012AS 200498
MIRRA	MIRRA GR3012AS 200499
CUOIO	CUOIO GR3012AS 200500
COGNAC	COGNAC GR3012AS 200501

Angolari DX e SX disponibili a richiesta.
RH and LH angle bracket available on request.

— Stoncrete volutamente si posiziona in un'area di gusto molteplice, da una parte la pietra e dall'altra il cemento, per rispondere a esigenze estetiche differenti, rappresentando così una soluzione adatta per più contesti, residenziali e non, garantendo una piena continuità tra indoor e outdoor.

— Stoncrete is deliberately positioned in a multiple taste area that includes both stone and, concrete, in order to meet different style requirements. This makes it a solution that can adapt to a wide range of residential and non-residential contexts as well as guaranteeing complete continuity between indoors and outdoors.



stoncrete

COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G Bla



N



60X120-24"x48"




60X60-24"x24"


CG	STCR 12CG AS RM 175600	STCR 60CG AS RM 175603
G	STCR 12G AS RM 175602	STCR 60G AS RM 175605
DG	STCR 12DG AS RM 175601	STCR 60DG AS RM 175604

PEZZI SPECIALI / SPECIAL PIECES


N



SQUARE BORDER costa lucida
SQUARE BORDER polished edge
60X60-24"x24"  




GRADONE costa lucida
TERRACE polished edge
33X60-13"x24"  




GRADONE costa lucida
TERRACE polished edge
33X120-13"x48"  

CG	STCR SB60CG AS 176196	STCR GR336CG AS 176199	STCR GR120CG AS 176203
G	STCR SB60G AS 176197	STCR GR336G AS 176200	STCR GR120G AS 176204
DG	STCR SB60DG AS 176198	STCR GR336DG AS 176201	STCR GR120DG AS 176205


N



ELEMENTO A ELLE
L-SHAPED
30x60x5-12"x24"x2"  



BORDO PISCINA costa lucida
POOL EDGE polished edge
30X60-12"x24"  



GRIGLIA PISCINA
POOL GRILLE
20X60-8"x24"  

CG	STCR L 60CG AS 182041	STCR BP60CG AS 176218	STCR GP60CG AS 176221
G	STCR L 60G AS 182044	STCR BP60G AS 176219	STCR GP60G AS 176222
DG	STCR L 60DG AS 182043	STCR BP60DG AS 176220	STCR GP60DG AS 176223

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
STCR AS	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.

Angolari DX e SX disponibili a richiesta.
RH and LH angle bracket available on request.

OUTDOOR — 18 mm - 20 mm

Il look del prodotto è ricercato ed elegante. I colori sono tredici e vanno dai classici toni del grigio fino ad inediti toni naturali, per proporre al mercato una soluzione ad effetto pietra assolutamente innovativa e adatta a qualsiasi contesto residenziale e commerciale leggero, sia per pavimento che per rivestimento.

The product has a sophisticated, elegant look. There are thirteen colours ranging from classic shades of grey to completely new natural shades, to offer the market a stone effect solution that is completely innovative and suited to any light residential or commercial context, both for flooring and cladding.



1

2

1 PIASEN L 90 AS
90X90-36°X36°





2 PIASEN 90AS RM
90X90-36°X36°



FIBOSC 90 AS RM
90X90-36°X36°





CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
THE ROCK AS	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42


Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.



90X90-36"x36"

BRECAP	BRECAP 90 AS RM 193700
FIBOSC	FIBOSC 90 AS RM 193701
FOGOLD	FOGOLD 90 AS RM 193702
GREINV	GREINV 90 AS RM 193703
NEGRES	NEGRES 90 AS RM 182653
SOAPST	SOAPST 90 AS RM 182654
ARDESI	ARDESI 90 AS RM 182655
TRARGE	TRARGE 90 AS RM 184957
BORVEN	BORVEN 90 AS RM 184955
MACAUB	MACAUB 90 AS RM 182656
DORSET	DORSET 90 AS RM 184956
PIASEN	PIASEN 90 AS RM 182652
BREIMP	BREIMP 90 AS RM 184958

PEZZI SPECIALI / SPECIAL PIECES




SQUARE BORDER *costa lucida*
SQUARE BORDER *polished edge*

90x90-36"x36"  

BRECAP	BRECAP SB90 AS 194355	BRECAP L 90 AS 194359
FIBOSC	FIBOSC SB90 AS 194356	FIBOSC L 90 AS 194360
FOGOLD	FOGOLD SB90 AS 194357	FOGOLD L 90 AS 194361
GREINV	GREINV SB90 AS 194358	GREINV L 90 AS 194362
NEGRES	NEGRES SB90 AS 183535	NEGRES L 90 AS 183530
SOAPST	SOAPST SB90 AS 183536	SOAPST L 90 AS 183531
ARDESI	ARDESI SB90 AS 183537	ARDESI L 90 AS 183532
TRARGE	TRARGE SB90 AS 188341	TRARGE L 90 AS 188241
BORVEN	BORVEN SB90 AS 188339	BORVEN L 90 AS 188239
MACAUB	MACAUB SB90 AS 183538	MACAUB L 90 AS 183533
DORSET	DORSET SB90 AS 188340	DORSET L 90 AS 188240
PIASEN	PIASEN SB90 AS 183534	PIASEN L 90 AS 183529
BREIMP	BREIMP SB90 AS 188342	BREIMP L 90 AS 188242

Angolari DX e SX disponibili a richiesta.
RH and LH angle bracket available on request.



ELEMENTO A ELLE
L-SHAPED

30x90x5-12"x36"x2"  

— Marciapiedi, cortili, aree verdi, camminamenti e zone carrabili: l'arredo urbano entra in una nuova dimensione progettuale con Trail, il contenitore del brand Imola pensato appositamente per pavimentare i contesti esterni cittadini e residenziali conciliando eleganza naturale, versatilità ed eccellenza prestazionale.

— Pavements, courtyards, green areas, walkways and vehicle-access zones: street decor moves into a new design dimension with Trail, the Imola brand container designed specifically to pave urban and residential external contexts combining natural elegance, versatility and outstanding performance.



1 TCOT EMI 60ASRM
60X60-24"X24"



2 TCOT EMI 69ASRM
60X90-24"X38"



1 QUAR BIA 60ASRM
60X60-24"X24"



2 QUAR BIA 69ASRM
60X90-24"X38"





1 QUAR GRI18 23
20X30-8"X12"



2 QUAR GRI18 20
20X20-8"X8"





OUTDOOR — 18 mm - 20 mm —

1 PIAS GRE18 23
20X30-8"X12"



2 PIAS GRE18 20
20X20-8"X8"





OUTDOOR — 18 mm - 20 mm —

1 PORF MIX18 20
20X20-8"X8"



2 PORF MIX18 E20
20X20X4-8"X8"X1,6"



3 MK.PORF MIX18 1
35,5X42-14"X16,5"





OUTDOOR — 18 mm - 20 mm —



OUTDOOR — 18 mm - 20 mm —



OUTDOOR — 18 mm - 20 mm —



OUTDOOR — 18 mm - 20 mm —

	
20x20 - 8"x8"	20x30 - 8"x12"
MXST GRE18 20 187863	MXST GRE18 23 187867

	
60x60 - 24"x24"	60x90 - 24"x36"
MXST GRE 60ASRM 187871	MXST GRE 69ASRM 187879



OUTDOOR — 18 mm - 20 mm —

			
			
	20x20 - 8"x8"	20x30 - 8"x12"	35,5x42 - 4"x16,5"
			
	29,6x37,6 - 11,6"x14,8"		
	QUAR BIA18 20 176404	QUAR BIA18 23 176408	MK.QUAR BIA18 1 177055
			MK.QUAR BIA18 2 177059

			
			
	60x60 - 24"x24"	60x90 - 24"x36"	
	QUAR BIA 60ASRM 187874	QUAR BIA 69ASRM 187882	



QUAR GRI



OUTDOOR — 18 mm - 20 mm —

20x20 - 8"x8"	20x30 - 8"x12"	35,5x42 - 4"x16,5"	29,6x37,6 - 11,6"x14,8"
QUAR GRI18 20 176403	QUAR GRI18 23 176407	MK.QUAR GRI18 1 177056	MK.QUAR GRI18 2 177060

60x60 - 24"x24"	60x90 - 24"x36"		
QUAR GRI 60ASRM 187875	QUAR GRI 69ASRM 187883		



OUTDOOR — 18 mm - 20 mm —

18		20x20 - 8"x8"	20x30 - 8"x12"	35,5x42 - 4"x16,5"	29,6x37,6 - 11,6"x14,8"
		PIAS GRE18 20 176402	PIAS GRE18 23 176406	MK.PIAS GRE18 1 177053	MK.PIAS GRE18 2 177057

20		60x60 - 24"x24"	60x90 - 24"x36"
		PIAS GRE 60ASRM 187872	PIAS GRE 69ASRM 187880



OUTDOOR — 18 mm - 20 mm —

— Vibes, una sorta di quarzite fusion, fedele alla sua essenza primordiale, sviluppata in tonalità neutre di intensità fra il chiaro ed il medio sia nei colori più caldi che nei colori più freddi. La serie è completata con la versione outdoor a spessore 10 mm e con quella a 20 mm che presenta il nuovo formato 60x90 cm.

— Vibes, a sort of fusion quartzite, that is faithful to its primordial essence and developed in neutral tones with an intensity from light to medium in both warm and cold colours. The series is completed with a 10 mm thick outdoor version and the new 20 mm thick 60x90 cm format.





N



60X90-24"x36"




60X60-24"x24"


DG	VIBES 69DG ASRM 179769	VIBES 60DG ASRM 179612
G	VIBES 69G ASRM 179768	VIBES 60G ASRM 179609
W	VIBES 69W ASRM 179767	VIBES 60W ASRM 179610
B	VIBES 69B ASRM 179765	VIBES 60B ASRM 179603
BS	VIBES 69BS ASRM 179766	VIBES 60BS ASRM 179611

PEZZI SPECIALI / SPECIAL PIECES


N



SQUARE BORDER costa lucida
SQUARE BORDER polished edge
60X60-24"x24"  




GRADONE costa lucida
TERRACE polished edge
33X60-13"x24"  




GRADONE costa lucida
TERRACE polished edge
33X90-13"x36"  

DG	VIBES SB60DG AS 180378	VIBES GR336DGAS 180383	VIBES GR339DGAS 180413
G	VIBES SB60G AS 180379	VIBES GR336G AS 180384	VIBES GR339G AS 180414
W	VIBES SB60W AS 180380	VIBES GR336W AS 180385	VIBES GR339W AS 180413
B	VIBES SB60B AS 180376	VIBES GR336B AS 180381	VIBES GR339B AS 180411
BS	VIBES SB60BS AS 180377	VIBES GR336BSAS 180382	VIBES GR339BSAS 180412


N




ELEMENTO A ELLE
L-SHAPED
30x60x5-12"x24"x2"  



ELEMENTO A ELLE
L-SHAPED
30x90x5-12"x36"x2"  



BORDO PISCINA costa lucida
POOL EDGE polished edge
30X60-12"x24"  



GRIGLIA PISCINA
POOL GRILLE
20X60-8"x24"  

DG	VIBES L 60DG AS 182066	VIBES L 90DG AS 181833	VIBES BP60DGAS 180403	VIBES GP60DGAS 180408
G	VIBES L 60G AS 182067	VIBES L 90G AS 181834	VIBES BP60G AS 180404	VIBES GP60G AS 180409
W	VIBES L 60W AS 182068	VIBES L 90W AS 181835	VIBES BP60W AS 180405	VIBES GP60W AS 180410
B	VIBES L 60B AS 182064	VIBES L 90B AS 181831	VIBES BP60B AS 180401	VIBES GP60B AS 180406
BS	VIBES L 60BS AS 182065	VIBES L 90BS AS 181832	VIBES BP60BSAS 180402	VIBES GP60BSAS 180407

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
VIBES AS	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.

Angolari DX e SX disponibili a richiesta.
RH and LH angle bracket available on request.

È dalla forza dinamica delle diagonali che nasce X-Rock. X sottolinea la natura innovativa della collezione, Rock ne contestualizza la provenienza: la roccia, la pietra. È il primo progetto che interpreta una pietra dove quello che vedi non è ciò che è: la superficie appare spigolosa ma in realtà è morbida; sembra a tinta unita ma non lo è; sembra non riflettere ma se ci cammini sopra tutto cambia.

It is the dynamic force of diagonals that has given rise to X-Rock. X underlines the innovative nature of the collection. Rock indicates its origin: rock, stone. This is the first stone design where what you see is not what you get. The surface appears to be angular, but in reality it is soft. It seems to be a solid colour, but that is not the case. It looks like it doesn't reflect, but if you walk on it, everything changes.




1 X-ROCK 12G AS
60X120-24"X48"



2 X-ROCK 60G AS
60X60-24"X24"



3 X-ROCK SB 60G AS
60X60-24"X24"



4 X-ROCK 12B
60X120-24"X48"




5 X-ROCK 60B AS
60X60-24"X24"



x-rock

COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G Bla

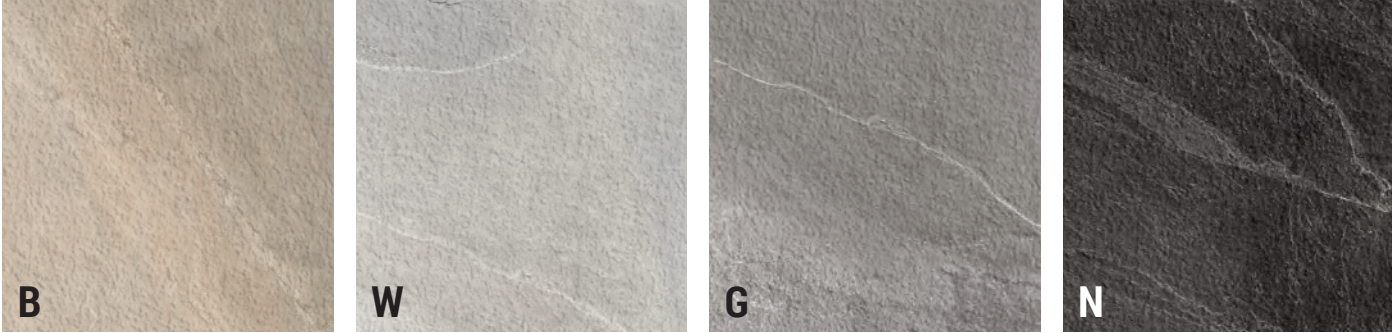

N



60X120-24"x48"

N



60X60-24"x24"

B	X-ROCK 12B AS 175587	X-ROCK 60B AS 155754
W	X-ROCK 12W AS 175590	X-ROCK 60W AS 155755
G	X-ROCK 12G AS 175588	X-ROCK 60G AS 155756
N	X-ROCK 12N AS 175589	X-ROCK 60N AS 155757

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS


	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
X-ROCK AS	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.




PEZZI SPECIALI / SPECIAL PIECES

N




SQUARE BORDER costa lucida
SQUARE BORDER polished edge
60X60-24"x24"  

N



GRADONE costa lucida
TERRACE polished edge
33X60-13"x24"  


N



GRADONE costa lucida
TERRACE polished edge
33X120-13"x48"  


B	X-ROCK SB60B AS 176245	X-ROCKGR336B AS 176249	X-ROCKGR120B AS 176253
W	X-ROCK SB60W AS 176248	X-ROCKGR336W AS 176252	X-ROCKGR120W AS 176256
G	X-ROCK SB60G AS 176246	X-ROCKGR336G AS 176250	X-ROCKGR120G AS 176254
N	X-ROCK SB60N AS 176247	X-ROCKGR336N AS 176251	X-ROCKGR120N AS 176255

N




ELEMENTO A ELLE
L-SHAPED
30x60x5-12"x24"x2"  

N



BORDO PISCINA costa lucida
POOL EDGE polished edge
30X60-12"x24"  

N



GRIGLIA PISCINA
POOL GRILLE
20X60-8"x24"  

B	X-ROCK L 60B AS 182046	X-ROCK BP60B AS 176273	X-ROCK GP60B AS 176277
W	X-ROCK L 60W AS 182049	X-ROCK BP60W AS 176276	X-ROCK GP60W AS 176280
G	X-ROCK L 60G AS 182047	X-ROCK BP60G AS 176274	X-ROCK GP60G AS 176278
N	X-ROCK L 60N AS 182048	X-ROCK BP60N AS 176275	X-ROCK GP60N AS 176279

Angolari DX e SX disponibili a richiesta.
RH and LH angle bracket available on request.

SOLUZIONI DI POSA

Laying solutions

— IL GRES PORCELLANATO AD ALTO SPESSORE METTE A DISPOSIZIONE UN SET DI SOLUZIONI DI POSA ADATTE AD OGNI TERRENO E SUPERFICIE OUTDOOR, PER GARANTIRE LA MASSIMA VERSATILITÀ APPLICATIVA. QUALSIASI SIA LA SUPERFICIE COINVOLTA NELL'INTERVENTO, IL GRES PORCELLANATO DI IMOLA RICHIEDE I MEDESIMI SISTEMI DI POSA DEI MATERIALI COMUNI ALL'OUTDOOR. È FACILE E VELOCE DA INSTALLARE. EVITA FESSURAZIONI E ROTTURE. È RIUTILIZZABILE.

— The high thickness tile offers a series of laying solutions that suit any kind of terrain and outdoor surface to guarantee the highest level of installation versatility. Whatever the surface involved in the project, Imola porcelain software requires the same laying systems as common outdoor materials. Easy and quick to install. No splitting or breakages. Reusable.



Posa su erba
Laying on grass



Posa su sabbia o ghiaia
Laying on sand or gravel



Posa su massetto con colla
Laying on screed with tile adhesive



Posa sopraelevata
Laying on raised surfaces

È ideale per chi cerca un sistema di posa che sia in grado di preservare il manto erboso, consentendo di viverlo senza rovinarlo con pesi o calpestii. È indicata per camminamenti di aree residenziali e pubbliche. Al fine di una piena stabilità del supporto ceramico, si consiglia di scavare il terreno dai 5 agli 8 cm al fine di creare un sottostrato, da riempire con della ghiaia granulare fine, affinché il fondo sia compatto e planare. Per una più facile manutenzione, si consiglia di far coincidere il lato superiore della piastrella con quello del manto erboso: in questo modo, con estrema facilità, si potranno utilizzare macchinari, come il tosaerba, evitando inoltre delle sporgenze del supporto ceramico, pericolose anche per il passaggio di persone e mezzi.

This is ideal for anyone seeking a laying system that can protect a grass surface and allow it to be enjoyed without ruining it with heavy weights or footfall. It is particularly suitable for residential and public area walkways. To create a stable base for the tiles, we suggest you dig out 5 to 8 cm of earth in order to create a substrate that can be filled with fine gravel to create a compact and level foundation. To make maintenance easier, we suggest you align the upper side of the tile with the grass surface. This will allow you to use machines, like lawnmowers easily and avoid having tile edges sticking out, as this can be dangerous for people, machines and vehicles.

Consente di ottenere un pavimento immediatamente calpestabile senza la necessità di un massetto e senza l'uso di malte e colle. Il vantaggio della posa su ghiaia o su sabbia è utile per mantenere inalterato il drenaggio del terreno, attraverso la fuga tra le lastre, garantendo il deflusso delle acque in falda. È particolarmente indicato nei fondali in terra ma anche nei fondali in cemento come ad esempio su terrazze o balconi. Resistente, non gelivo, antiscivolo e facile da installare e da pulire, è inalterabile a qualsiasi condizione climatica ed è inattaccabile da muffe, muschi e trattamenti verde rame.

This allows a floor to be created that can be walked on immediately without having to lay a screed first or use tile adhesives or mortars. The advantage of laying on sand or gravel is that it does not change the way the terrain drains, as, thanks to the space between the tiles, any rainwater will flow into the groundwater. It is particularly suitable for earth and concrete bases, like terraces and balconies, for example. Durable, frost-resistant, skid-proof and easy to install and clean, it can stand up to any climate condition and is resistant to mould, moss and verdigris treatments.

È la posa ideale per rivestire aree carrabili in esterno, parcheggi auto, rampe di garage, essendo la superficie posata estremamente resistente sia ai carichi dinamici che a quelli concentrati. Sono necessari i giunti di dilatazione e le fughe tra le lastre devono essere riempite con stucco cementizio. Occorre fare riferimento alle normative specifiche di ogni singolo Paese per realizzare una pavimentazione a regola d'arte.

This is the ideal laying system for covering outdoor vehicle-access areas, car parks and garage ramps, as it is a highly resistant laying surface in terms of both dynamic and focused loads. Here, expansion joints and the space between the tiles must be filled with a cement grout. To create truly state-of-the-art flooring, it is important to refer to the specific standards in force in the country in question.

I pavimenti sopraelevati da esterno sono indicati per la realizzazione di terrazzi o di camminamenti in ambienti esterni. Le caratteristiche uniche di questo sistema rispondono alle più rigide normative di legge in tema di sicurezza, ecologia e performance. I vantaggi di questo tipo di installazione sono molteplici: può essere effettuata su una pavimentazione esistente, senza doverla rimuovere e senza oneri inutili aggiuntivi; è inoltre facilmente ispezionabile, questo per verificare l'eventuale presenza di fogliame o di residui che possono in alcuni casi ostruire il corretto deflusso delle acque. La colonna di supporto del pavimento sopraelevato da esterno è in polipropilene. È composta da una base con una grande superficie d'appoggio con bordo arrotondato antistrappo che consente la posa del supporto su qualsiasi superficie d'appoggio planare, garantendo una miglior ripartizione del carico sullo strato sottostante.

Outdoor raised floors are particularly suitable for creating terraces or walkways in external environments. The unique characteristics of this system satisfy the strictest legal standards in terms of safety, ecology and performance. This kind of installation has multiple benefits. It can be laid over an existing floor without having to remove it and without any extra useless costs. It is also easy to inspect, so any waste or fallen leaves that may obstruct water drainage can be removed. The supporting column of a raised outdoor floor is made of polypropylene. It consists of a base with a large support surface featuring a rounded, anti-tear edge that allows tiles to be installed on any level support surface, while also ensuring that the load is evenly divided over the entire substrate.

Non poteva mancare per Imola, brand contemporaneo che soddisfa ogni esigenza di stile e di funzionalità, l'inserimento in gamma, per tutti i propri progetti best seller, di nuovi articoli per gli spazi esterni.

La versione 10 mm si rivolge a tutti coloro che necessitano di una posa tradizionale e che a livello progettuale cercano una piena continuità estetica tra l'ambiente interno e quello esterno.

Numerose sono le ragioni per le quali scegliere questo tipo di supporto: l'impermeabilità in quanto l'acqua e l'umidità non vengono assorbite dal grès che possiede un coefficiente di assorbimento inferiore allo 0,5%. La resistenza al gelo: è insensibile agli sbalzi di temperatura (eccezionale freddo o caldo). Infine la sua piena stabilità cromatica: i colori non si alterano seppur il supporto ceramico sia continuamente sottoposto all'esposizione di agenti atmosferici quali sole e smog.

New tiles for outdoor spaces had to be included in all Imola's best-selling collections, as it is a modern brand that satisfies all requirements in terms of both style and practicality.

The 10 mm version is ideal for anyone looking for a traditional installation and who, at a design level, desire seamless continuity between indoors and outdoors.

There are numerous reasons for choosing this kind of tile. To begin with, stoneware is waterproof as it absorbs almost no water or humidity and has an absorption coefficient of less than 0.5%. It is also resistant to frost and sudden changes in temperature (exceptional heat or cold). Last of all, it offers complete chromatic stability. So, the colours do not change even if the ceramic tile is continuously exposed to intense conditions like sunshine and pollution.



OUTDOOR 10 mm THICKNESS






OUTDOOR — 10 mm —



azuma rock™	—118
azuma up™	—120
azuma™	—122
blox	—124
closer	—126
creative concrete	—128
crew bitter	—130
crew honey	—132
crew umami	—134
lime-rock	—136
micron 2.0	—138
mycro	—140
replay	—142
stoncrete	—144
the rock™	—146
vibes	—148
x-rock	—150





OUTDOOR _____ 10 mm _____


					
		120X120-48"x48"	60X120-24"x48"	20X120-8"x48"	90X90-36"x36"
azuma rock™	S		●		
	AV		●		
	W		●		
	CG		●		
	AG		●		
	G		●		
azuma up™	W		●		
	AV		●		
	S		●		
	NO		●		
	TP		●		
azuma™	CG		●		
	AG		●		
	G		●		
	DG		●		
	N		●		
blox	BS				
	B				
	W				
	AG				
	G				
	DG				
closer	GB		●		
	W		●		
	AV		●		
	B		●		
	BS		●		
creative concrete	B				
	W				
	G				
	DG				
	N				
crew bitter	A		●		
	B		●		
	TO		●		
crew honey	B			●	
	BS			●	
	NO			●	
crew umami	A	●			
	B	●			
	TO	●			

			PEZZI SPECIALI / SPECIAL PIECES	
				
37,5x75-15°X30°	60X60-24°x24°	30X60-12°x24°	30X60-12°x24°	20X60X4-8°X24°X1.6°
	●			
	●			
	●			
	●			
	●			
	●			
		</		

					
		120X120-48"x48"	60X120-24"x48"	20X120-8"x48"	90X90-36"x36"
lime-rock	A				
	W				
	G				
	N				
micron 2.0	T				
	B				
	A				
	W				
	GH				
	G				
	DG				
mycro	B	●			
	A	●			
	WX	●			
	AG	●			
	MG	●			
	GN	●			
replay	BC	●			
	BN	●			
	WX	●			
	G	●			
	DG	●			
	N	●			
stoncrete	CG		●		●
	AG		●		●
	G		●		●
	DG		●		●
the rock™	BRECAP		●		
	FIBOSC		●		
	FOGOLD		●		
	GREINV		●		
	NEGRES		●		
	SOAPST		●		
	ARDESI		●		
	TRARGE		●		
	BORVEN		●		
	MACAUB		●		
	DORSET		●		
	PIASEN		●		
	BREIMP		●		

[illegible]

					
		120X120-48"x48"	60X120-24"x48"	20X120-8"x48"	90X90-36"x36"
vibes	DG		●		
	G		●		
	W		●		
	B		●		
	BS		●		
x-rock	B		●		
	W		●		
	G		●		
	N		●		

					PEZZI SPECIALI / SPECIAL PIECES	
		37,5x75-15"x30"	60X60-24"x24"	30X60-12"x24"		
					30X60-12"x24"	20X60X4-8"x24"x1.6"
	●					●
	●					●
	●					●
	●					●
	●					●
	●					●
	●	●			●	●
	●	●			●	●
	●	●			●	●
	●	●			●	●
	●	●			●	●

Angolari DX e SX disponibili a richiesta.
RH and LH angle bracket available on request.

I pezzi speciali ed i fondi possono presentare leggere differenze di tonalità fra di loro.
Special pieces and backgrounds can have slightly different shades from one another.


Il bordo può mostrare una piccola diversità cromatica fra la superficie ed il corpo del pezzo ceramico.
There can be a slight colour difference on the edge between the surface and the main ceramic piece.



azuma rock™

COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G Bla

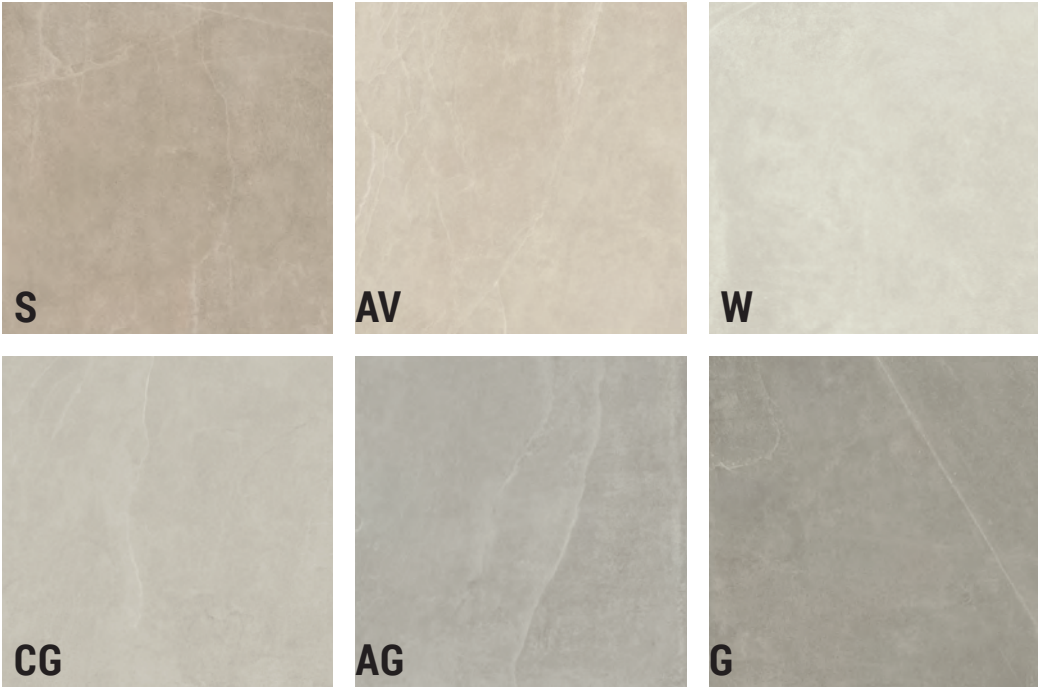

60X120-24"x48"

60X60-24"x24"

S	A.RCK R12S RM 193201	A.RCK R60S RM 193218
AV	A.RCK R12AV RM 193197	A.RCK R60AV RM 193214
W	A.RCK R12W RM 193202	A.RCK R60W RM 193219
CG	A.RCK R12CG RM 193199	A.RCK R60CG RM 193216
AG	A.RCK R12AG RM 193198	A.RCK R60AG RM 193215
G	A.RCK R12G RM 193200	A.RCK R60G RM 193217

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
A.RCK R	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.

A.ROCK R12AG RM
60X120-24"x48"






A.UP R12AV RM
60X120-24"X48"

azuma up™

COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G BIa

RM V2 10

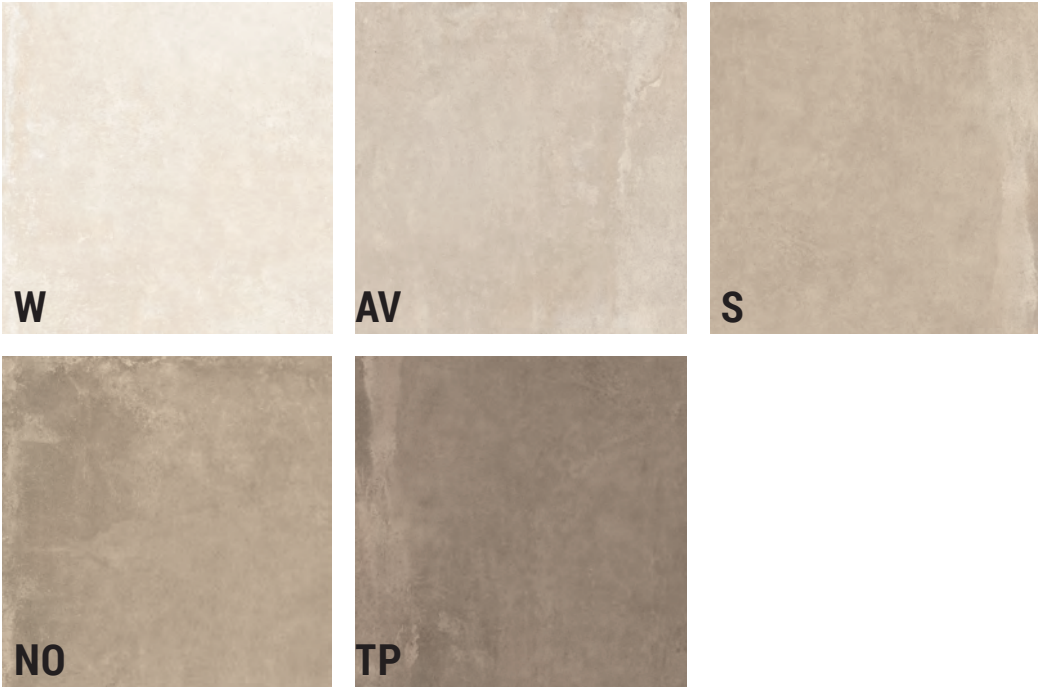

W	A.UP R12W RM 177714
AV	A.UP R12AV RM 177715
S	A.UP R12S RM 177716
NO	A.UP R12NO RM 177717
TP	A.UP R12TP RM 177718

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
A.UP RB	R11	B+C	>0.4	>0.4	>36	P3	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.

OUTDOOR — 10 mm —




azuma™

COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G BIa

RM V2 10

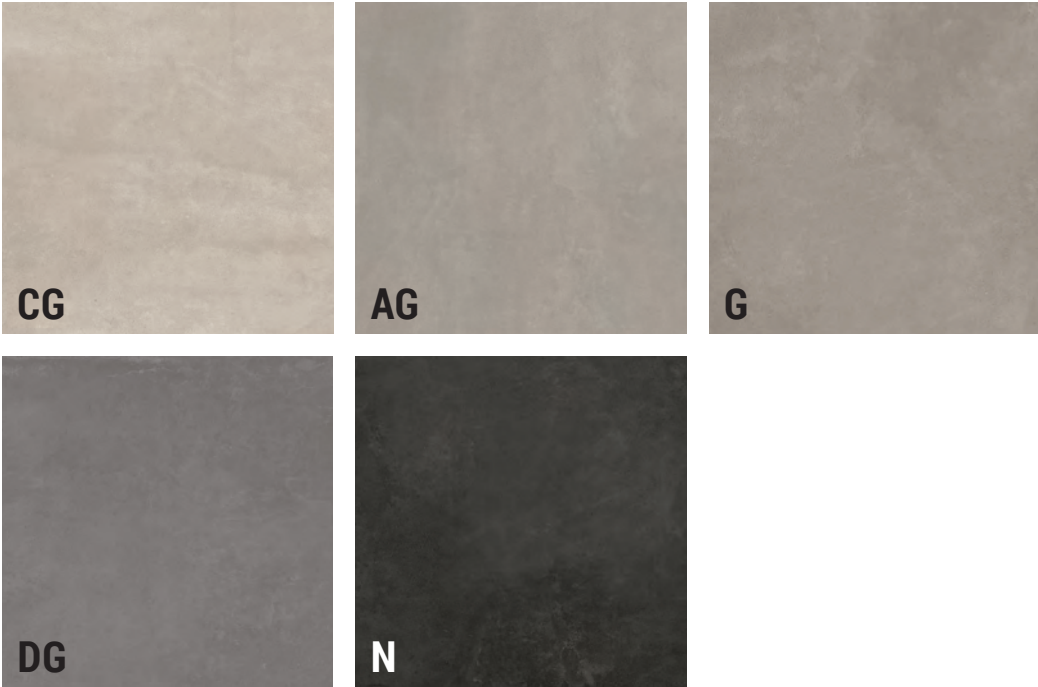

OUTDOOR — 10 mm —

N

60X120-24"x48"

CG	AZMA RB12CG RM 165203
AG	AZMA RB12AG RM 165202
G	AZMA RB12G RM 165205
DG	AZMA RB12DG RM 165204
N	AZMA RB12N RM 165206

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
AZMA RB	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.

AZMA RB12DG RM
60X120-24"x48"



1 BLOX R60G RM
60X60 - 24"X24"



2 BLOX 90G RM
90X90 - 36"X36"



2

blox


COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G BIa



RM V2

10

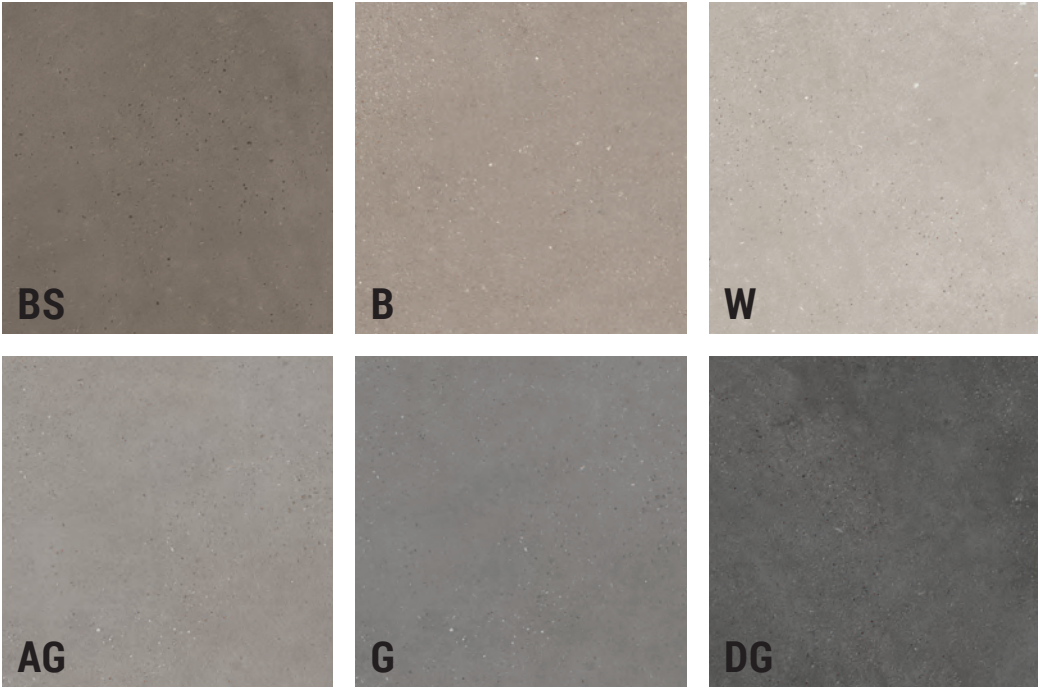

OUTDOOR — 10 mm

		PEZZI SPECIALI / SPECIAL PIECES	
N O	60X60-24"X24"	30X60-12"X24"  8	20X60X4-8"X24"X1.6"  6
	BS	BLOX S R60BS 174794	BLOX E R60BS 174788
	B	BLOX S R60B 174795	BLOX E R60B 174788
	W	BLOX S R60W 174796	BLOX E R60W 174788
	AG	BLOX S R60AG 174797	BLOX E R60AG 174788
	G	BLOX S R60G 174798	BLOX E R60G 174788
	DG	BLOX S R60DG 174799	BLOX E R60DG 174788

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
BLOX R	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.



1 CLOSER 120B
120X120-48"X48"



2 CLOSER R12B
60X120-24"X48"




closer

THROUGH-BODY PORCELAIN TILE
HIGH PERFORMANCE
GRES PORCELLANATO A TUTTA MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G Bla

RM V2 10,5

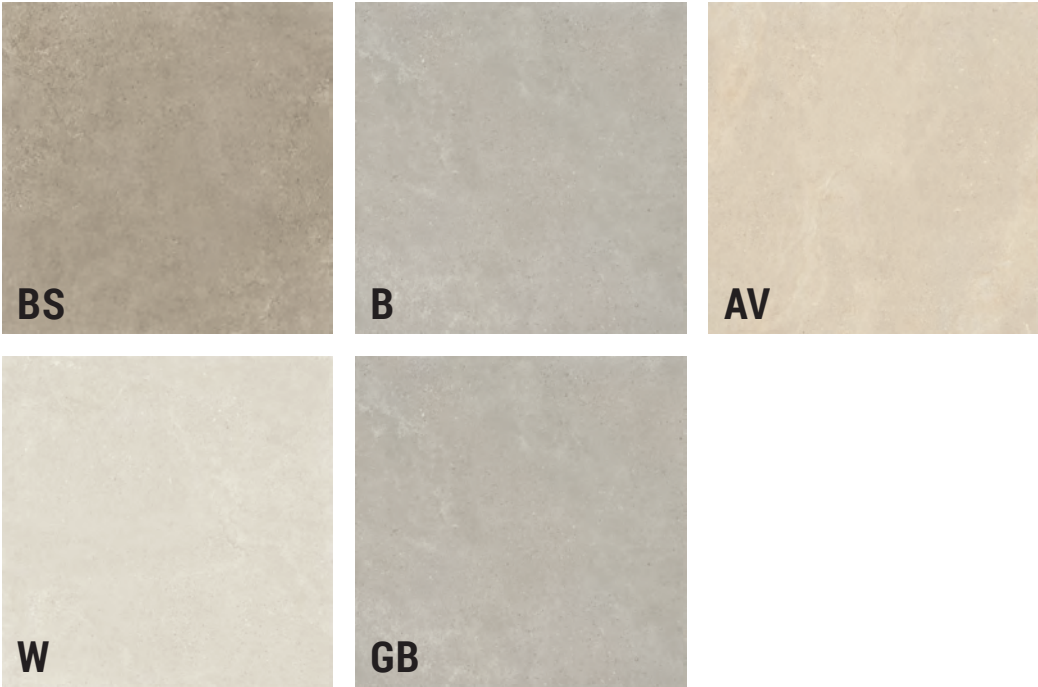

BS	CLOSER R12BS 200885
B	CLOSER R12B 200884
AV	CLOSER R12AV 200883
W	CLOSER R12W 200882
GB	CLOSER R12GB 200881

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

C.O.S.E.R.	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
COSER R	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42


Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.



creative concrete

COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G BIa

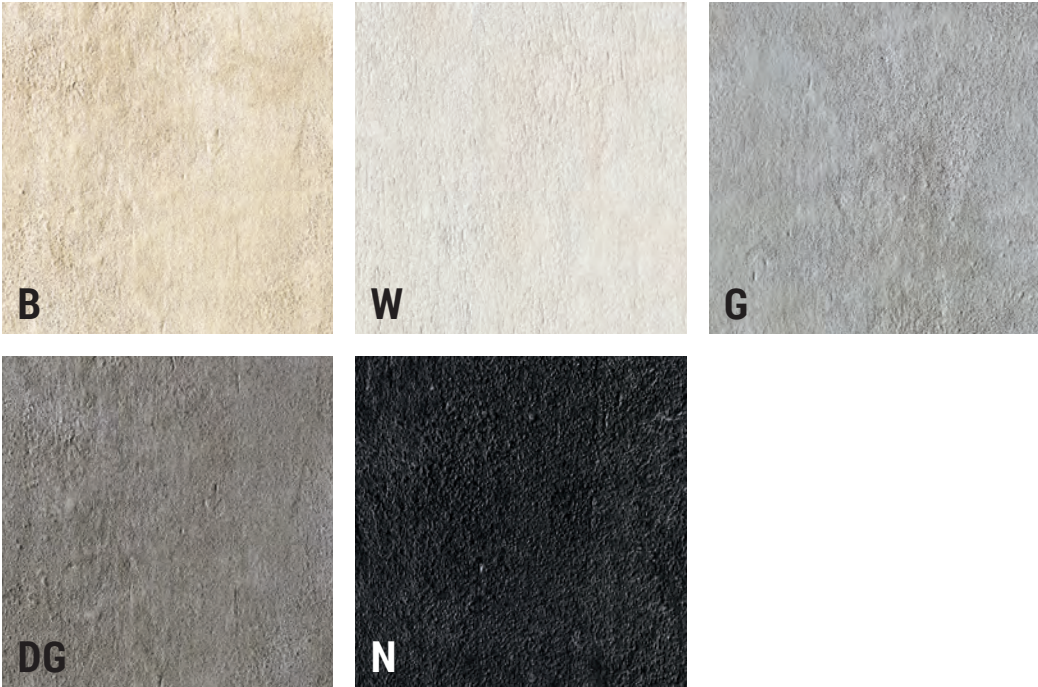

OUTDOOR — 10 mm —

		
	60X60-24"X24"	30X60-12"X24"
B	CREACON R 60B 181226	CREACON R 36B 139086
W	CREACON R 60W 181231	CREACON R 36W 139090
G	CREACON R 60G 181228	CREACON R 36G 139088
DG	CREACON R 60DG 181227	CREACON R 36DG 139087
N	CREACON R 60N 181229	CREACON R 36N 139089

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

CREACON R	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
	R11	A	>0.4	>0.4	>36	P3	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.



1 CR BIT 12B RM
60X120-24"X48"



2 CR BIT R12B RM
60X120-24"X48"




crew bitter

COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA


CONFORME / ACCORDING TO
UNI EN 14411 - G BIa



RM V2



A




B



TO

OUTDOOR — 10 mm —



60X120-24"x48"



60X60-24"X24"

A	CR BIT R12A RM 190660	CR BIT R60A RM 190664
B	CR BIT R12B RM 190661	CR BIT R60B RM 190670
TO	CR BIT R12TO RM 190662	CR BIT R60TO RM 190671

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

CR BIT R	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.



crew honey

COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G BIa

RM V2 10



OUTDOOR — 10 mm —

N

20x120 - 8"x48"

A	CR HO R2012B RM 190756
BS	CR HO R2012BSRM 190757
NO	CR HO R2012NORM 190758

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
CR HON R	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.

CR HO R2012BSRM
20X120-8"X48"



CR UMA R120B RM
120X120-48"X48"




crew umami

COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G BIa



OUTDOOR — 10 mm



120X120-48"X48"



60X60-24"X24"

A	CR UMA R120A RM 190786	CR UMA R60A RM 190792
B	CR UMA R120B RM 190787	CR UMA R60B RM 190793
TO	CR UMA R120TORM 190788	CR UMA R60TO RM 190794

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
CR UMAR	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.




lime-rock

COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G BIa

 RM  V2   10

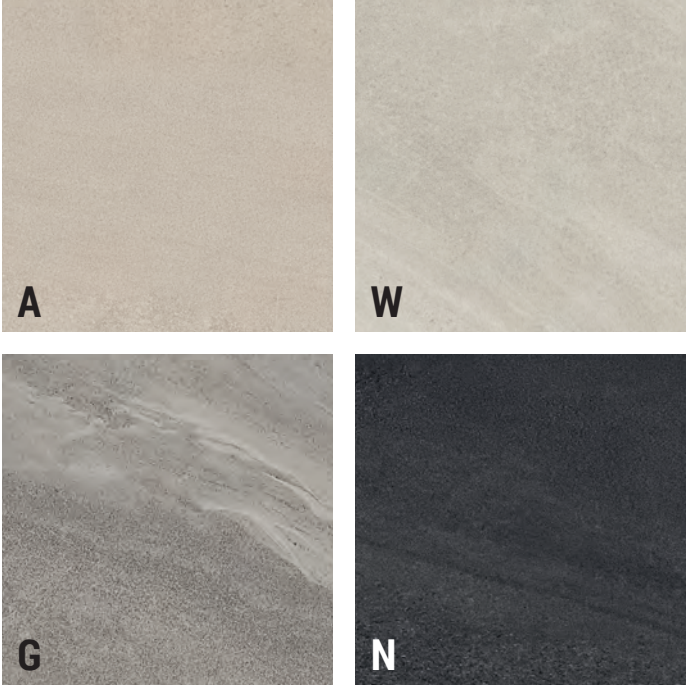

A	LMRCK RB377A RM 166817
W	LMRCK RB377W RM 166820
G	LMRCK RB377G RM 166818
N	LMRCK RB377N RM 166819

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
LMRCK RB	R11	B+C	>0.4	>0.4	>36	P3	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.

LMRCK RB377G RM
37,5X75-15°X30°




- 1-2 M2.0 RB60B
60X60-24"X24"
- 3 M2.0 12B
60X120-24"X48"

micron 2.0

THROUGH-BODY PORCELAIN TILE
HIGH PERFORMANCE
GRES PORCELLANATO A TUTTA MASSA
CONFORME / ACCORDING TO
UNI EN 14411 - G Bla

RM V2 10,5

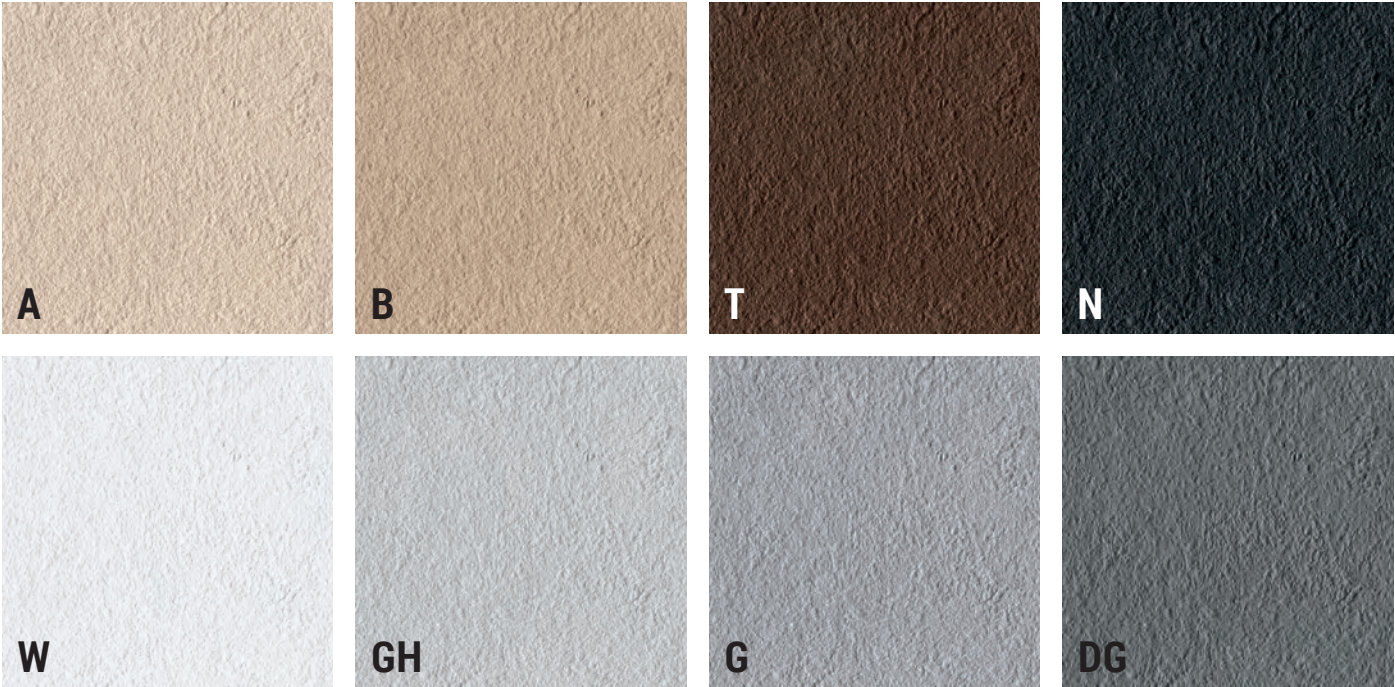

OUTDOOR — 10 mm —

	60X60-24"X24"		30X60-12"X24"	
A	M2.0 RB60A 133412		M2.0 RB36A 133420	
B	M2.0 RB60B 133413		M2.0 RB36B 133421	
T	M2.0 RB60T 133416		M2.0 RB36T 133424	
N	M2.0 RB60N 133414		M2.0 RB36N 133422	
W	M2.0 RB60W 133418		M2.0 RB36W 133426	
GH	M2.0 RB60GH 133419		M2.0 RB36GH 133427	
G	M2.0 RB60G 133417		M2.0 RB36G 133425	
DG	M2.0 RB60DG 133415		M2.0 RB36DG 133423	

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
M2.0 RB	R11	B+C	>0.4	>0.4	>36	P3	2	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.




1 MYCRO R12B RM
60X120-24"x48"

2 MYCRO 120WX RM
120X120-48"x48"

mycro

THROUGH-BODY PORCELAIN TILE
HIGH PERFORMANCE
GRES PORCELLANATO A TUTTA MASSA
CONFORME / ACCORDING TO
UNI EN 14411 - G Bla

RM V2 10,5

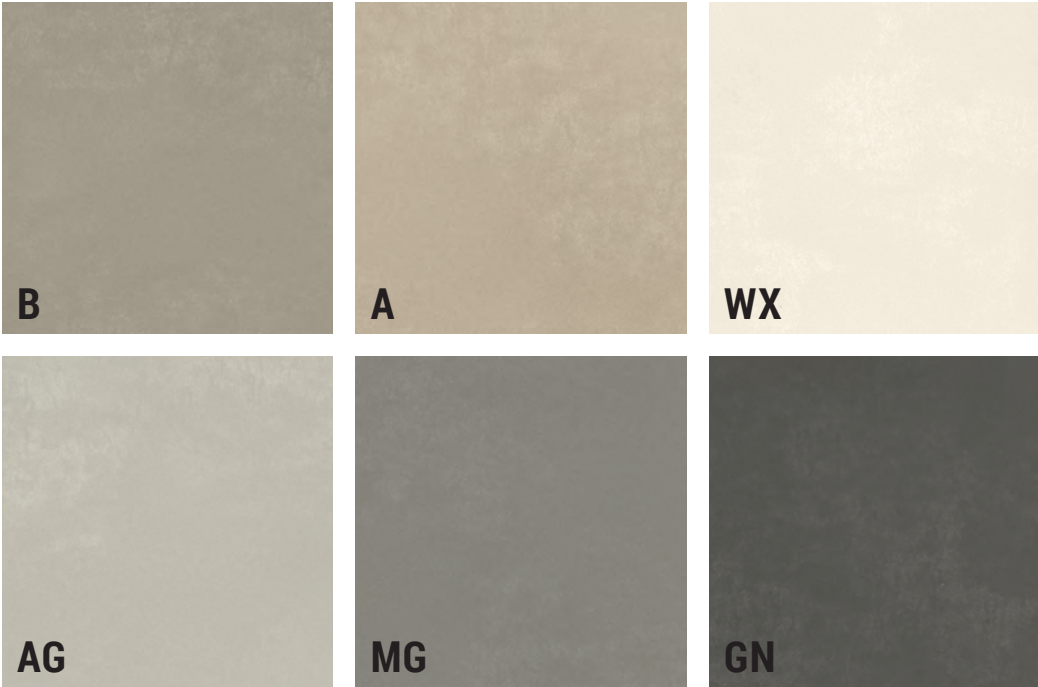

N

O

120X120-48"x48"

60X60-24"x24"

B	MYCRO R120B RM 200050	MYCRO R60B RM 200056
A	MYCRO R120A RM 200049	MYCRO R60A RM 200055
WX	MYCRO R120WX RM 200051	MYCRO R60WX RM 200057
AG	MYCRO R120AG RM 200054	MYCRO R60AG RM 200060
MG	MYCRO R120MG RM 200053	MYCRO R60MG RM 200059
GN	MYCRO R120GN RM 200052	MYCRO R60GN RM 200058

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

MYCRO R	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
	R11	B+C	>0.4	>0.4	>36	P4	1	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.




REPLAY R120BCRM
120X120-48"X48"

replay

THROUGH-BODY PORCELAIN TILE
HIGH PERFORMANCE
GRES PORCELLANATO A TUTTA MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G Bla

RM ^{V2} 10,5

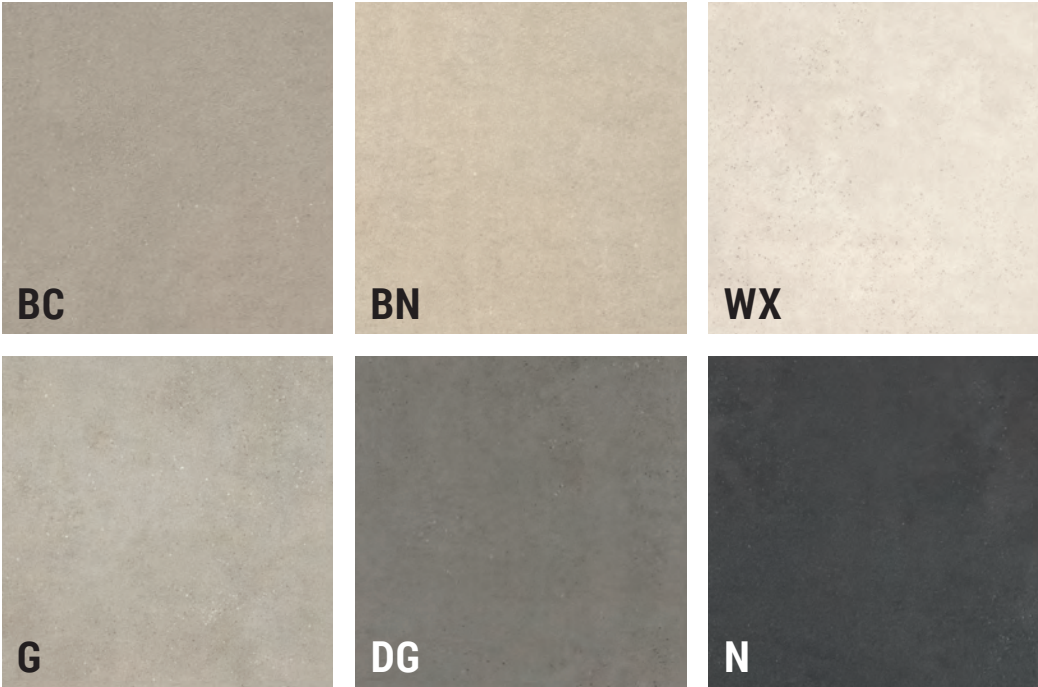

	120X120-48"X48"	60X60-24"X24"
BC	REPLAY R120BCRM 192476	REPLAY R60BC RM 192458
BN	REPLAY R120BNRM 192477	REPLAY R60BN RM 192459
W	REPLAY R120WXR 192481	REPLAY R60WX RM 192463
G	REPLAY R120G RM 192479	REPLAY R60G RM 192461
DG	REPLAY R120DGRM 192478	REPLAY R60DG RM 192460
N	REPLAY R120N RM 192480	REPLAY R60N RM 192462

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
REPLAY R	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.


OUTDOOR — 10 mm —




stoncrete

COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA


CONFORME / ACCORDING TO
UNI EN 14411 - G BIa

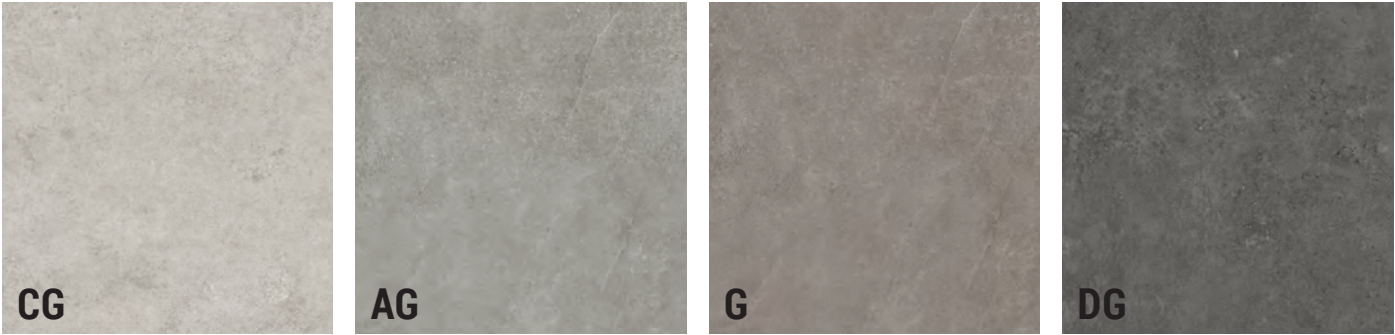

OUTDOOR — 10 mm

N				
	60X120-24"x48"	90X90-36"x36"	60X60-24"x24"	30X60-12"x24"
	CG	STCR R12CG RM 171904	STCR R90CG RM 171975	STCR R60CG RM 171912
	AG	STCR R12AG RM 171905	STCR R90AG RM 171974	STCR R60AG RM 171913
	G	STCR R12G RM 171906	STCR R90G RM 171976	STCR R60G RM 171914
	DG	STCR R12DG RM 171907	STCR R90DG RM 171977	STCR R60DG RM 171915

PEZZI SPECIALI / SPECIAL PIECES

N		
	30X60-12"x24" △ 8	20X60X4-8"x24"x1.6" △ 6
CG	STCR S R60CG 172262	STCR E R60CG 172266
AG	STCR S R60AG 172263	STCR E R60AG 172267
G	STCR S R60G 172264	STCR E R60G 172268
DG	STCR S R60DG 172265	STCR E R60DG 172269

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
STCR R	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42


Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.



the rock™

COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G BIa



BRECAP



FIBOSC



FOGOLD



GREINV



NEGRES



SOAPST



ARDESI



TRARGE



BORVEN



MACAUB



DORSET



PIASEN



BREIMP

	N	
	60x120-24"x48"	60X60-24"x24"
BRECAP	BRECAP R12RM 193688	BRECAP R60 RM 193692
FIBOSC	FIBOSC R12RM 193689	FIBOSC R60 RM 193693
FOGOLD	FOGOLD R12RM 193690	FOGOLD R60 RM 193694
GREINV	GREINV R12RM 193691	GREINV R60 RM 193695
NEGRES	NEGRES R12 RM 187229	NEGRES R60 RM 187244
SOAPST	SOAPST R12 RM 187230	SOAPST R60 RM 187245
ARDESI	ARDESI R12 RM 187231	ARDESI R60 RM 187239
TRARGE	TRARGE R12 RM 187235	TRARGE R60 RM 187246
BORVEN	BORVEN R12 RM 187233	BORVEN R60 RM 187240
MACAUB	MACAUB R12 RM 187232	MACAUB R60 RM 187243
DORSET	DORSET R12 RM 187234	DORSET R60 RM 187242
PIASEN	PIASEN R12 RM 187228	PIASEN R60 RM 187238
BREIMP	BREIMP R12 RM 187236	BREIMP R60 RM 187241

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

THE ROCK RB	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.

GREINV R12 RM
60x120-24"x48"



OUTDOOR — 10 mm




vibes

COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G BIa



RM V2



DG




G



W



B



BS



60X120-24"x48"



60X60-24"x24"

DG	VIBES R12DG RM 179599	VIBES R60DG RM 180073
G	VIBES R12G RM 179597	VIBES R60G RM 180074
W	VIBES R12W RM 179596	VIBES R60W RM 180075
B	VIBES R12B RM 179595	VIBES R60B RM 180069
BS	VIBES R12BS RM 179598	VIBES R60BS RM 180072

PEZZI SPECIALI / SPECIAL PIECES



20X60X4-8"x24"x1.6" △ 6

VIBES E R60DG 180368
VIBES E R60G 180369
VIBES E R60W 180370
VIBES E R60B 180366
VIBES E R60BS 180367

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
VIBES RB	R11	B+C	>0.4	>0.4	>36	P4	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.

VIBES R60B RM
60X60-24"x24"







x-rock

COLOR BODY PORCELAIN TILE
GRES PORCELLANATO COLORATO IN MASSA

CONFORME / ACCORDING TO
UNI EN 14411 - G BIa



RM V2



OUTDOOR — 10 mm

				PEZZI SPECIALI / SPECIAL PIECES	
N					
	60X120-24"x48"	60X60-24"x24"	30X60-12"x24"	30X60-12"x24" △ 8	20X60X4-8"x24"x1.6" △ 6
B	X-ROCK RB12B 165224	X-ROCK RB60B 157044	X-ROCK RB36B 157048	X-ROCK S RB60B 168530	X-ROCK E RB60B 168526
W	X-ROCK RB12W 165227	X-ROCK RB60W 157045	X-ROCK RB36W 157049	X-ROCK S RB60W 168533	X-ROCK E RB60W 168529
G	X-ROCK RB12G 165225	X-ROCK RB60G 157046	X-ROCK RB36G 157050	X-ROCK S RB60G 168531	X-ROCK E RB60G 168527
N	X-ROCK RB12N 165226	X-ROCK RB60N 157047	X-ROCK RB36N 157051	X-ROCK S RB60N 168532	X-ROCK E RB60N 168528

CARATTERISTICHE TECNICHE SPECIFICHE / TECHNICAL FEATURES SPECIFICATIONS

X-ROCK RB	DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901/ 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
			C.A.	G.B.				
	R11	B+C	>0.4	>0.4	>36	P3	3	>0,42

Valori medi riferiti al prodotto integro prima della posa. / Average value referred to the full tile before installation.

1 X-ROCK RB60B
60X60-24"x24"




2 X-ROCK E RB60B
20X60X4-8"x24"x1.6"



informazioni tecniche

TECHNICAL INFORMATION



Preparazione del sottofondo
Preparing the substrate

Qualsiasi sia lo spazio destinato alla posa del gres porcellanato da esterno, che sia un viale, un camminamento o un portico, necessita di una base stabile. Per queste ragioni occorre utilizzare dei materiali inerti, come la ghiaia, da utilizzare a riempimento dell'area scavata al fine di creare uno strato uniforme di circa 30 mm sotto al livello previsto per la posa. È consigliato utilizzare poi un compattatore a piastra vibrante per consolidare gli inerti.


Whatever the space destined for laying outdoor porcelain stoneware, whether it is an avenue, a walkway or a portico, it requires a stable base. This is why inert materials, like gravel, should be used to fill the excavated area to create a uniform layer about 30 mm below the level required for laying. We also recommend using a compactor with a vibrator plate to consolidate the inert materials.



Pendenze
Slopes

Ogni superficie posata necessita di un adeguato sistema di drenaggio affinché l'acqua di superficie, attraverso una corretta inclinazione delle piastrelle, possa defluire lontano da eventuali edifici verso un punto di raccolta adeguato, a bordo del giardino o in un canale di scolo.

Every laid surface requires an adequate drainage system so that surface water can flow away from eventual buildings, thanks to the correct inclination of the tiles towards a suitable collection point, at the edge of the garden or in a drainage ditch.



Posa e fughe
Posa e fughe

La scelta dello schema di posa varia a seconda della tipologia di gres porcellanato scelto, dal numero di formati disponibili, dalla tipologia di intervento da effettuare e dal proprio gusto estetico. In contesti di outdoor, il gres porcellanato non deve essere posato a giunto unito. Per una fuga uniforme tra le lastre è consigliato l'utilizzo degli appositi distanziatori. Gli stucchi cementizi a presa rapida sono ideali poiché non subiscono variazioni nel tempo, difficilmente modificano la propria colorazione e non sono soggetti ad alghe o muffe.

The choice of laying pattern depends on the type of porcelain stoneware chosen, the number of formats available, the type of installation and your own style and taste. In outdoor contexts, porcelain stoneware should not be laid without grouting. To ensure the grouting between the tiles is even, we suggest you always use spacers. Quick setting cement grouts are ideal as they do not change over time or become discoloured and they are both resistant to algae and mould.



Pulizia e manutenzione
Cleaning and maintenance

Il gres porcellanato è resistente alle intemperie ed ha una bassa porosità rendendolo così la soluzione ideale per una facile e veloce manutenzione. Non ha bisogno di essere coperto e può essere facilmente pulito con un detergente delicato, spazzole di gomma o macchine idropulitrici.

Porcelain stoneware is resistant to bad weather and has low porosity, which makes it the ideal solution for rapid and easy maintenance. It does not need to be covered and it can be cleaned easily with a delicate detergent, rubber brushes or a high-pressure cleaning machine.

caratteristiche tecniche gres porcellanato

TECHNICAL SPECIFICATIONS PORCELAIN STONEWARE
UNI EN 14411 (ISO 13006) - Bla (appendice/appendix G)

CARATTERISTICA Specification	METODO DI PROVA Test methods	REQUISITI PREVISTI DALLA NORMA Requirements in accordance to the standards	VALORE MEDIO Average value
 DIMENSIONI E ASPETTO DIMENSIONS AND APPEARANCE	ISO 10545-2	PROSPETTO G.1 PROSPECT G.1	CONFORME COMPLIANT
 ASSORBIMENTO D'ACQUA WATER ABSORPTION	ISO 10545-3	≤ 0,5%	< 0,1%
 RESISTENZA A FLESSIONE FLEXURAL RESISTANCE		min./MIH 35 N/mm²	> 45 N/mm²
 SFORZO DI ROTTURA MODULUS OF RUPTURE	ISO 10545-4	SPESSORE / THICKNESS ≥ 7,5 mm: min. 1300N SPESSORE / THICKNESS < 7,5 mm: min. 700 N	6,5 mm1800 N*
			SPESSORE* THICKNESS*10 mm3000 N*
			20 mm13000 N*
 RESISTENZA ALL'ABRAZIONE PROFONDA DEEP ABRASION RESISTANCE	ISO 10545-6	≤ 175 mm³	< 140 mm³
 COEFFICIENTE DILATAZIONE TERMICA LINEARE (α) LINEAR EXPANSION THERMIC COEFFICIENT	ISO 10545-8	METODO DISPONIBILE AVAILABLE ON REQUEST	≤ 7x10 ⁻⁶ °C ⁻¹
 RESISTENZA AGLI SBALZI TERMICI RESISTANCE TO SUDDEN TEMPERATURE CHANGES	ISO 10545-9	METODO DISPONIBILE AVAILABLE ON REQUEST	RESISTE RESISTANT
 RESISTENZA AL GELO FROST RESISTANCE	ISO 10545-12	RICHIESTA ALWAYS TESTED	RESISTE RESISTANT
 PRODOTTI CHIMICI AD USO DOMESTICO ED ADDITIVI PER PISCINA HOUSEHOLD CHEMICALS AND SWIMMING POOL WATER CLEANSERS		min. B	min. B
ACIDI ED ALCALI A BASSA CONCENTRAZIONE ACIDS AND LOW CONCENTRATION ALKALIS	ISO 10545-13	DA LA, LB A LC FROM LA, LB TO LC	DA LA, LB A LC FROM LA, LB TO LC
ACIDI ED ALCALI AD ALTA CONCENTRAZIONE ACIDS AND HIGH CONCENTRATION ALKALIS		METODO DISPONIBILE AVAILABLE ON REQUEST	METODO DISPONIBILE AVAILABLE ON REQUEST
 RESISTENZA ALLE MACCHIE UGL STAIN RESISTANCE UGL	ISO 10545-14	METODO DISPONIBILE AVAILABLE ON REQUEST	METODO DISPONIBILE AVAILABLE ON REQUEST
RESISTENZA ALLE MACCHIE GL STAIN RESISTANCE GL		min. 3	min. 3

* VALORI RIFERITI AL FORMATO 60X60 / VALUES REFERRED TO 60X60 SIZE



A brand of
Cooperativa Ceramica d'Imola S.c.

Via V. Veneto, 13
40026 Imola (BO) Italia
Tel. +39 0542 601601
Fax +39 0542 31749

IMOLACERAMICA.IT





IMOLA a brand of Cooperativa Ceramica d'Imola